

***sunlite***

# Fixture Catalog

to the lighting industry

**LED** | 2018



ENERGY STAR is a U.S. Environmental Protection Agency (EPA) voluntary program that helps businesses and individuals save money and protect our climate through superior energy efficiency.



The DesignLights Consortium® (DLC) is a project of Northeast Energy Efficiency Partnerships (NEEP), a regional non-profit founded in 1996 whose mission is to serve the Northeast and Mid-Atlantic to accelerate energy efficiency in the building sector through public policy, program strategies and education. The DLC promotes quality, performance and energy efficient commercial sector lighting solutions through collaboration among its federal, regional, state, utility, and energy efficiency program members; luminaire manufacturers; lighting designers and other industry stakeholders throughout the U.S. and Canada.



The product has been tested by Intertek and found in compliance with accepted national standards.



UL is a global independent safety science company offering expertise in certification, validation, testing, inspections, auditing, education and advisory services.



The item is dimmable. For Dimmer Compatibility List go to [www.sunlite.com/dimmers](http://www.sunlite.com/dimmers)



LED Lighting Facts® is a program of the U.S. Department of Energy that showcases LED products for general illumination from manufacturers who commit to testing products and reporting performance results according to industry standards



The definition and aim of the RoHS directive is quite simple. The RoHS directive aims to restrict certain dangerous substances commonly used in electronic and electronic equipment. Any RoHS compliant component is tested for the presence of Lead (Pb), Cadmium (Cd), Mercury (Hg), Hexavalent chromium (Hex-Cr), Polybrominated biphenyls (PBB), and Polybrominated diphenyl ethers (PBDE). For Cadmium and Hexavalent chromium, there must be less than 0.01% of the substance by weight at raw homogeneous materials level. For Lead, PBB, and PBDE, there must be no more than 0.1% of the material, when calculated by weight at raw homogeneous materials. Any RoHS compliant component must have 100 ppm or less of mercury and the mercury must not have been intentionally added to the component.



The Americans with Disabilities Act (ADA) was enacted into law in 1991. ADA was a broad-sweeping piece of legislation's that mandated many changes in the design and layout of publicly accessible areas to accommodate disabled persons. ADA does not therefore focus exclusively on lighting, but it does have a direct effect on the design of lighting relative to the amount of projection allowable for wall sconces and lanterns, and relative to the amount of clearance for hanging lights and lanterns.

Section 4.4 of the ADA contains language specific to lighting: "objects projecting from walls with their leading edges between 27 inches and 80 inches (2' 4" to 6' 8") above the finished floor shall protrude no more than four inches into walks, halls, corridors, passageways or aisles".



The Illuminating Engineering Society (IES) is a non-profit learned society that was founded in New York City on January 10, 1906. The IES's stated mission is to improve the lighted environment by bringing together those with lighting knowledge and by translating that knowledge into actions that benefit the public. Members of the IES are regarded as professionals in their industry and are globally respected for their knowledge.



NSF International (formerly known as the National Sanitation Foundation) is an independent, non-profit organization that certifies food service equipment and ensures it is designed and constructed in a way that promotes food safety. NSF is internationally recognized and most food service equipment is NSF certified.



The American Lighting Association is a trade association representing the lighting industry. Its membership includes lighting, ceiling fan and dimming control manufacturers, retail showrooms, sales representatives and lighting designers dedicated to provide the public with the proper application of quality residential lighting.

For product inquiries or to place an order, please contact us at:

TOLL FREE PHONE: **800.605.BULB**

VISIT: **[www.sunlite.com](http://www.sunlite.com)**

For general information: **[info@sunlite.com](mailto:info@sunlite.com)**

Sales department: **[sales@sunlite.com](mailto:sales@sunlite.com)**

To request a catalog: **[catalog@sunlite.com](mailto:catalog@sunlite.com)**

## New York

744 Clinton Street Brooklyn, NY 11231  
t: 718.768.7000 f: 718.768.0970

## Florida

3698 1/2 NW 16th Street Bay C Lauderhill, FL 33311  
t: 954.316.6130 f: 954.316.6019



## About us

Sunshine Lighting was founded in 1980 by Morty Kohn as a one man operation. It evolved into a multinational enterprise, growing at a rapid pace to become one of the leading lighting manufacturers in the United States. Sunshine Lighting takes great pride in maintaining the personal relationship with each customer.

In 1996 Sunshine Lighting began developing and manufacturing the Sunlite® brand, producing many lighting technologies, including a vast selection of LED, Compact Fluorescent, Incandescent, HID, Halogen, Decorative, Miniature, Specialty, Stage and Studio lamps as well as a large collection of electrical supplies and Light Fixtures. The Sunlite® brand has gained a reputation of quality and affordability and keeps up with the latest technologies to provide the most advanced products in the lighting industry.

In today's fast paced world, we understand that availability is vital. With our 100,000+ square feet of warehouse space we stock more than 13,000 different products so that we are able to provide immediate service to all our customers. We also carry all major brands including Osram-Sylvania, General Electric (GE), Philips, Ushio, Universal and many others.

Through customer interaction and feedback, we work tirelessly to introduce new and innovative products to the marketplace as well as constantly improving our existing line of items to meet the high expectations our customers have come to rely on us for.

Our dedicated team of technical and product specialists ensures that our products are designed with safety and the environment in mind. Many of our products carry the Underwriters Laboratories and/or Energy Star certifications. Sunlite® is also partnered with the U.S. Department of Energy (DOE) Lighting Facts program, the Design Lights Consortium (DLC), and the American Lighting Association (ALA) among others.

# Table of Contents

## Indoor Fixtures

---

Ceiling Mounted .....	6
Sconces.....	15
Pendants .....	18
Downlights/Retrofits .....	21
Vanity.....	26
Undercabinet .....	29
Linear.....	32
Flat Panels/Troffers.....	38
High Bays.....	40
Step Lights .....	44
AC Light Engines.....	45
Strip Lights .....	46

## Outdoor Fixtures

---

Polycarbonate Series .....	50
Area Lights.....	53
Wall Mounted .....	56
Security .....	61
Landscape.....	62
Sconces.....	62
Jelly Jars .....	65
Temporary Highbays.....	66
Corn Cob Lamps.....	67
Work Lights .....	68
Refrigerator Lights.....	69

## Traditional Linear

---

Strip Fixtures.....	70
Lamps.....	72
Terms and Conditions .....	75





Indoor

# Decorative Flush Mount

## Double Band Trim

Sunlite's LED decorative band trim fixtures feature a stylish design with a clean appearance. Its decorative brushed nickel band trim adds a touch of elegance to any room's decor. It provides general illumination and is ideal for bedrooms, hotels, offices, and many other settings.

- Steel Body with White Acrylic Lens
- Brushed Nickel Finish - Standard
- 80 CRI
- 90 CRI Available On Demand
- UL/ETL Listed - Damp Location
- Built To Order Polished Brass and Oil Rubbed Bronze Housing Option
- Available to Customize In 3500K And 5000K
- See Page 7 For Emergency and Motion Sensor Versions
- Available to Customize in 277 Volts




### Applications



Residential Commercial



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
<b>10" Diameter</b>										
88355-SU	LFX/DCO10/BN/15W/E/D/30K	15	940	120	3000K	50000	✓	✓	10.0"	3.0"
88357-SU	LFX/DCO10/BN/15W/E/D/40K	15	960	120	4000K	50000	✓	✓	10.0"	3.0"
<b>12" Diameter</b>										
88335-SU	LFX/DCO12/BN/15W/E/D/30K	15	1050	120	3000K	35000	✓	✓	12.0"	3.5"
88315-SU	LFX/DCO12/BN/15W/E/D/40K	15	1100	120	4000K	35000	✓	✓	12.0"	3.5"
<b>14" Diameter</b>										
88336-SU	LFX/DCO14/BN/21W/E/D/30K	21	1500	120	3000K	35000	✓	✓	14.0"	3.8"
88318-SU	LFX/DCO14/BN/21W/E/D/40K	21	1600	120	4000K	35000	✓	✓	14.0"	3.8"
<b>16" Diameter</b>										
88337-SU	LFX/DCO16/BN/24W/E/D/30K	24	1700	120	3000K	35000	✓	✓	16.0"	3.8"
88321-SU	LFX/DCO16/BN/24W/E/D/40K	24	1800	120	4000K	35000	✓	✓	16.0"	3.8"
<b>18" Diameter</b>										
88323-SU	LFX/DCO18/BN/28W/E/D/30K	28	2000	120	3000K	35000	✓	✓	18.0"	4.0"
88334-SU	LFX/DCO18/BN/28W/E/30K/277V	28	2000	277	3000K	50000	-	-	18.0"	4.0"
88324-SU	LFX/DCO18/BN/28W/E/D/40K	28	2100	120	4000K	35000	✓	✓	18.0"	3.8"

# Emergency Backup and Motion Sensor Decorative Flush Mount

Double Band Trim



Available



Available



## Applications



Residential



Commercial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
<b>12" Diameter Emergency Battery Backup</b>										
45600-SU	LFX/DCO12/BN/15W/D/30K/EM	15	1050	120	3000K	50000	✓	-	12.0"	4.5"
45601-SU	LFX/DCO12/BN/15W/D/40K/EM	15	1100	120	4000K	50000	✓	-	12.0"	4.5"
<b>14" Diameter Emergency Battery Backup</b>										
45602-SU	LFX/DCO14/BN/20W/D/30K/EM	20	1500	120	3000K	50000	✓	-	14.0"	4.5"
45603-SU	LFX/DCO14/BN/20W/D/40K/EM	20	1600	120	4000K	50000	✓	-	14.0"	4.5"
<b>16" Diameter Emergency Battery Backup</b>										
45604-SU	LFX/DCO16/BN/23W/D/30K/EM	23	1700	120	3000K	50000	✓	-	16.0"	4.5"
45605-SU	LFX/DCO16/BN/23W/D/40K/EM	23	1800	120	4000K	50000	✓	-	16.0"	4.5"
<b>18" Diameter Emergency Battery Backup</b>										
45563-SU	LFX/DCO18/BN/28W/D/30K/EM	28	2000	120	3000K	50000	✓	-	18.0"	4.5"
45569-SU	LFX/DCO18/BN/28W/D/40K/EM	28	2100	120	4000K	50000	✓	-	18.0"	4.5"
<b>16" Diameter Built-in Motion Sensor</b>										
45615-SU	LFX/DCO12/BN/15W/40K/MS	15	1100	120	4000K	50000	-	-	12.0"	4.5"
<b>12" Diameter Emergency Battery Backup and Built-in Motion Sensor</b>										
45616-SU	LFX/DCO12/BN/15W/40K/EM/MS	15	1100	120	4000K	50000	-	-	12.0"	4.5"



## Decorative Pendant Mount

Double Band Trim

- Steel Body with White Acrylic Lens
- Brushed Nickel or Oil Rubbed Bronze Finishes
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Finish	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
49032-SU	LFX/DCO12/30K	Brushed Nickel	15	1050	120	3000K	50000	✓	✓	12.0"	11.5"
49102-SU	LFX/DCO12/30K	Oil Rubbed Bronze	15	1100	120	3000K	50000	✓	✓	12.0"	11.5"

## Decorative Oval Flush Mount

Double Band Trim

- Steel Body with White Acrylic Lens
- Brushed Nickel, Oil Rubbed Bronze or Black Finishes
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Finish	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
49090-SU	LFX/DCO32/30K	Brushed Nickel	35	2600	120	3000K	50000	✓	✓	32.5"	18.0"	4.5"
49097-SU	LFX/DCO32/40K	Brushed Nickel	35	2650	120	4000K	50000	✓	✓	32.5"	18.0"	4.5"
49093-SU	LFX/DCO32/30K	Oil Rubbed Bronze	35	2600	120	3000K	50000	✓	✓	32.5"	18.0"	4.5"
49095-SU	LFX/DCO32/30K	Black	35	2600	120	3000K	50000	✓	✓	32.5"	18.0"	4.5"



## Decorative Flush Mount

### Half Band & Half Glass Trim

Sunlite's Half Band & Half Glass flush mount LED is a modern contemporary design to add a pleasant light fixture for any home. It uses the latest technology to provide that perfect atmosphere in any room.

- Steel Body with Frosted Glass Lens
- Brushed Nickel Finish
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
49094-SU	LFX/R/GL/20W/BN/30K	20	1000	120	3000K	50000	✓	-	11.0"	11.0"	2.5"
49096-SU	LFX/S/GL/20W/BN/30K	20	1000	120	3000K	50000	✓	-	11.0"	11.0"	2.5"

## Decorative Flush Mount

### Double Band Trim with Extended Lens

- Steel Body with Frosted Glass Lens
- Brushed Nickel Finish
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
49054-SU	LFX/DBN/13/20W/FR/DIM/30K	20	1200	120	3000K	50000	✓	✓	13.0"	7.0"
49055-SU	LFX/DBN/15/23W/FR/DIM/30K	23	1380	120	3000K	50000	✓	-	15.0"	7.5"

## Decorative Flush Mount

### Double Band Trim with Extended Lens

- Steel Body with Frosted Glass Lens
- Brushed Nickel Finish
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
49092-SU	LFX/DFM17/23W/BN/E/30K	23	1610	120	3000K	50000	✓	✓	17.0"	4.0"

# Classic Flush Mount

## Circline Style

The Sunlite LED classic flush mount fixture features a timeless Ceiling mount design with the latest LED technology.

- Steel Body with White Acrylic Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location
- Available in 3500K and 5000K Options




### Applications



Residential Commercial



Item#	Description	Watt	Lumen	Volts	Color	Hours	Dim		DIA	H
<b>11" Diameter</b>										
50181-SU	LFX/AM/11/17W/30K	17	1570	120	3000K	50000	✓	✓	11.0"	3.5"
50182-SU	LFX/AM/11/17W/40K	17	1620	120	4000K	50000	✓	✓	11.0"	3.5"
<b>14" Diameter</b>										
50191-SU	LFX/AM/14/17W/30K	17	1570	120	3000K	50000	✓	✓	14.0"	3.5"
50192-SU	LFX/AM/14/17W/40K	17	1620	120	4000K	50000	✓	✓	14.0"	3.5"
50193-SU	LFX/AM/14/17W/50K	17	1650	120	5000K	50000	✓	✓	14.0"	3.5"

# Decorative Flush Mount

## Solid Band Trim

The Sunlite LED Decorative Band Trim fixture features a simple and stylish design for a clean look. The decorative brushed nickel band trim adds a touch of elegance to a room's decor. Provides general illumination and is ideal for bedrooms, offices and hallways. The dimmable feature makes it ideal for areas where you want to dim the lights down.

- Steel Body with White Acrylic Lens
- Brushed Nickel Finish
- 81 CRI
- ETL Listed - Damp Location




### Applications



Residential Commercial



Item#	Description	Watt	Lumen	Volts	Color	Hours	Dim		DIA	H
<b>12" Diameter</b>										
49150-SU	LFX/AM/15/BN/E/D/30K	15	1050	120	3000K	50000	✓	✓	12.0"	3.5"
49151-SU	LFX/AM/15/BN/E/D/40K	15	1100	120	4000K	50000	✓	✓	12.0"	3.5"
<b>14" Diameter</b>										
49152-SU	LFX/AM/23/BN/D/E/30K	23	1610	120	3000K	50000	✓	✓	14.0"	3.5"
49155-SU	LFX/AM/23/BN/D/E/40K	23	1700	120	4000K	50000	✓	✓	14.0"	3.5"

# Mushroom Flush Mount

Modern White Lens

Sunlite's minimalistic LED mushroom ceiling lights will complement any modern home and office aesthetic, while also providing a pleasant dome of light for any residential space.

- Plastic Body with White Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location




## Applications



Residential Commercial



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
<b>11" Diameter</b>										
49111-SU	LFX/MU/13W/E/D/40K	13	900	120	4000K	35000	✓	✓	11.0"	4.0"
49122-SU	LFX/MU/15W/E/D/30K	15	1100	120	3000K	35000	✓	✓	11.0"	4.0"
49112-SU	LFX/MU/15W/E/D/40K	15	1130	120	4000K	35000	✓	✓	11.0"	4.0"
49118-SU	LFX/MU/16W/E/D/50K	15	1160	120	5000K	50000	✓	✓	11.0"	4.0"
<b>13" Diameter</b>										
49123-SU	LFX/MU/18W/E/D/30K	18	1300	120	3000K	35000	✓	✓	13.0"	4.0"
49113-SU	LFX/MU/18W/E/D/40K	18	1330	120	4000K	35000	✓	✓	13.0"	4.0"
<b>15" Diameter</b>										
49124-SU	LFX/MU/22W/E/D/30K	22	1600	120	3000K	35000	✓	✓	15.0"	4.0"
49114-SU	LFX/MU/22W/E/D/40K	22	1630	120	4000K	35000	✓	✓	15.0"	4.0"
<b>19" Diameter</b>										
49125-SU	LFX/MU/32W/E/D/30K	32	2000	120	3000K	35000	✓	✓	19.0"	4.0"
49115-SU	LFX/MU/32W/E/D/40K	32	2030	120	4000K	35000	✓	✓	19.0"	4.0"

# Decorative Flush Mount

Quad Band Trim

- Steel Body with White Acrylic Lens
- Oil Rubbed Bronze Finish
- 81 CRI
- ETL - Damp Location



## Applications



Residential Commercial



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
49098-SU	LFX/DCO13/GL/20W/ORB/30K	20	1000	120	3000K	50000	✓	-	13.0"	3.0"

## Surface Mount Downlights

### Economic Design

Sunlite surface mounted downlight with a slim profile. It's performance and look is of a traditional style downlight. Suitable for residential and commercial applications.

- Aluminum Body with Frosted Lens
- Brushed Nickel, Bronze or White Finish
- 80 CRI
- UL Listed - Wet Location
- 3000K Color Temperature



### Applications



Item#	Description	Watt	Lumen	Volt	Finish	Hours	Dim	☑	DIA	H
88380-SU	LFX/DISC/7.5"/16W/30K/E/D/WH	16	1200	120	White	50000	✓	✓	7.5"	1.6"
88384-SU	LFX/DISC/7.5"/16W/30K/E/D/BN	16	1200	120	Brushed Nickel	50000	✓	✓	7.5"	1.6"
88388-SU	LFX/DISC/7.5"/16W/30K/E/D/BRZ	16	1200	120	Bronze	50000	✓	✓	7.5"	1.6"

## Surface Mount Downlights

### Modern Design

Sunlite's LED decorative band trim fixtures feature a stylish design with a clean appearance. Its decorative brushed nickel or ORB band trim adds a touch of elegance to any room's decor. It provides general illumination and is ideal for home bedrooms, bathrooms, hotels, offices, and many other settings.

- Steel Body with White Acrylic Lens
- Brushed Nickel or Oil Rubbed Bronze Finishes
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	☑	DIA	H
<b>Oil Rubbed Bronze Finish</b>										
88353-SU	LFX/DCO7/ORB/E/D/15W/30K	15	1000	120	3000K	50000	✓	✓	7.4"	1.3"
88354-SU	LFX/DCO7/ORB/E/D/15W/40K	15	1020	120	4000K	50000	✓	✓	7.4"	1.3"
<b>Brushed Nickel Finish</b>										
88350-SU	LFX/DCO7/BN/E/D/15W/30K	15	1000	120	3000K	50000	✓	✓	7.4"	1.3"
88352-SU	LFX/DCO7/BN/E/D/15W/40K	15	1020	120	4000K	50000	✓	✓	7.4"	1.3"



# Surface Mount Downlights

## Premium Design

Sunlite brings to you their Mini Flat Panel series with simplistic design and cutting edge technology. These fixtures are designed to be used in lieu of downlights with the intent of cutting installation costs.

- Steel Body with White Lens
- White Finish
- Available in Oil Rubbed Bronze and Brushed Nickel
- 90 CRI
- ETL - Wet Location
- 120 Volts



### Applications



Item#	Description	Watt	Lumen	Color	Hours	Dim		L	W	H
<b>5.5" Round Design</b>										
81200-SU	LFX/MP/5.5R/11W/E/D/30K/WH	11	700	3000K	50000	✓	✓	5.7"	5.7"	1.1"
81201-SU	LFX/MP/5.5R/11W/E/D/40K/WH	11	730	4000K	50000	✓	✓	5.7"	5.7"	1.1"
<b>7" Round Design</b>										
81207-SU	LFX/MP/7R/14W/E/D/30K/WH	14	900	3000K	50000	✓	✓	7.2"	7.2"	1.1"
81208-SU	LFX/MP/7R/14W/E/D/40K/WH	14	930	4000K	50000	✓	✓	7.2"	7.2"	1.1"
<b>9" Round Design</b>										
81214-SU	LFX/MP/9R/19W/E/D/30K/WH	19	1200	3000K	50000	✓	✓	9.1"	9.1"	1.1"
81215-SU	LFX/MP/9R/19W/E/D/40K/WH	19	1230	4000K	50000	✓	✓	9.1"	9.1"	1.1"
<b>5.5" Square Design</b>										
81202-SU	LFX/MP/5.5S/11W/E/D/30K/WH	11	700	3000K	50000	✓	✓	5.7"	5.7"	1.1"
81203-SU	LFX/MP/5.5S/11W/E/D/40K/WH	11	730	4000K	50000	✓	✓	5.7"	5.7"	1.1"
<b>7" Square Design</b>										
81209-SU	LFX/MP/7S/14W/E/D/30K/WH	14	900	3000K	50000	✓	✓	7.2"	7.2"	1.1"
81210-SU	LFX/MP/7S/14W/E/D/40K/WH	14	930	4000K	50000	✓	✓	7.2"	7.2"	1.1"
<b>9" Square Design</b>										
81216-SU	LFX/MP/9S/19W/E/D/30K/WH	19	1200	3000K	50000	✓	✓	9.1"	9.1"	1.1"
81217-SU	LFX/MP/9S/19W/E/D/40K/WH	19	1230	4000K	50000	✓	✓	9.1"	9.1"	1.1"

## Classic Flush Mount

Frosted Lens

The Sunlite LED Decorative Dome Fixture features a traditional style that blends effortlessly into a variety of décors. Its simple elegance and pleasing look make it ideal for illuminating any room in your home. LED technology makes it a maintenance free and energy saving solution. Designed with a brushed nickel finish, combined with an alabaster glass.

- Steel Body with Alabaster Glass Lens
- Brushed Nickel Finish
- 81 CRI
- ETL - Damp Location



Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
49050-SU	LFX/DBN13/AL/E/D/30K	20	1400	120	3000K	50000	✓	✓	13.0"	5.5"
49058-SU	LFX/DBN15/AL/E/D/30K	23	1610	120	3000K	50000	✓	✓	15.0"	6.0"

## Contemporary Crystal Design

Flush or Pendant Mount

Sunlite's crystal dome light fixtures and pendants are an excellent decorative source of light for any stylish foyer, ballroom, museum, home office, and much more. This fixture features dozens of exquisite crystals that encapsulates the light around it to emit a much more impressive beam of prismatic light that'll surely impress those in its vicinity.

- Steel Body with Crystal Lenses
- Chrome Finish
- 80 CRI
- ETL - Damp Location



Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
Surface Mounting										
88341-SU	LFX/DCH/13/20W/D/30K	20	1400	120	3000K	50000	✓	-	12.5"	4.8"
Pendant Mounting										
88342-SU	LFX/PD/CH/9W/D/30K	9	450	120	3000K	50000	✓	-	5.9"	7.3"

## Flush Mount Drum

### Fabric Shade

The Sunlite LED Fabric Single Drum fixture offers a contemporary design combined with the energy savings of LED. This Fixture is available in four different sizes and lumen outputs.

- Steel Body with White Lens
- Brushed Nickel and Fabric Finish
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
49076-SU	LFX/FD/11.5/15W/DIM/BN/30K	15	900	120	3000K	35000	✓	-	11.0"	5.0"
49077-SU	LFX/FD/13.5/20W/DIM/BN/30K	20	1200	120	3000K	35000	✓	-	13.0"	5.0"
49078-SU	LFX/FD/15.5/23W/DIM/BN/30K	23	1380	120	3000K	35000	✓	-	15.0"	5.0"
49079-SU	LFX/FD/17.5/28W/DIM/BN/30K	28	1680	120	3000K	35000	✓	-	17.0"	5.0"

## Decorative Wall Sconce

### Antique Style

The Sunlite Decorative Wall Sconce fixtures are ideal for living rooms, bedrooms and foyers. Their steel housing and amber glass lens create a beautiful antique look. Their fully dimmable capability enhances the warm feel these fixtures create.

- Steel Body with Amber Glass
- Copper Bronze Finish
- 81 CRI
- UL Listed - Dry Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		W	D	H
49023-SU	LFX/WS/5/12W/DIM/30K	12	600	120	3000K	50000	✓	-	5.5"	3.5"	9.0"
49024-SU	LFX/WS/6/15W/DIM/30K	15	900	120	3000K	50000	✓	-	6.0"	4.0"	11.0"

## Decorative Half Cylinder Wall Sconce

Double Band Trim

The Sunlite LED Decorative Half Cylinder Wall Sconce fixtures are ideal for vanity, hallway and foyer areas. Their clean minimalistic design will add an elegant touch to your room.

- Steel Body with Acrylic Lens
- Brushed Nickel Finish
- 80 CRI
- ETL Listed - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	D
49075-SU	LFX/HC/BN/15W/30K	15	1080	120	3000K	35000	✓	✓	10.0"	7.0"	3.5"
49084-SU	LFX/HC/BN/15W/40K	15	1100	120	4000K	35000	✓	✓	10.0"	7.0"	3.5"
49137-SU	LFX/HC/BN/23W/E/30K	23	1610	120	3000K	50000	✓	✓	10.5"	9.5"	3.7"
49138-SU	LFX/HC/BN/23W/E/40K	23	1640	120	4000K	50000	✓	✓	10.5"	9.5"	3.7"

## Decorative Half Moon Wall Sconce


Solid Band Trim

The Sunlite Decorative Half Moon Wall Sconce fixtures are perfect for modern living rooms, foyers and hallways. Their durable steel body, white lens and brushed nickel finish, will bring a fresh feel to your space.

- Steel Body with White Lens
- Brushed Nickel or Polished Brass Finish
- 81 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		W	D	H
49070-SU	LFX/HM/BN/D/12W/30K	12	840	120	3000K	50000	✓	✓	12.0"	3.5"	6.0"
49071-SU	LFX/HM/BN/D/12W/40K	12	890	120	4000K	50000	✓	✓	12.0"	3.5"	6.0"
49085-SU	LFX/HM/PB/D/12W/30K	12	840	120	3000K	50000	✓	✓	12.0"	3.5"	6.0"



# Decorative Wall Sconce

Modern Design

The Sunlite LED Decorative Wall Sconce fixtures are ideal for living rooms and foyers. Their durable steel body and modern design will bring a fresh and elegant feel to your space.

- Steel Body with Frosted Lens
- Brushed Nickel Finish
- 81 CRI
- UL Listed - Dry Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		W	D	H
49017-SU	LFX/WS/AR/14/9W/DIM/30K	9	500	120	3000K	50000	✓	-	14.0"	2.8"	4.2"

# Decorative Wall Sconce

Contemporary Design

The Sunlite Decorative Wall Sconce fixtures will complement any contemporary style decor. Their open edges create a beautiful wall wash effect, highlighting the walls and allowing the room to feel more spacious. Their brushed nickel finish and frosted lens will be a great addition to any indoor space. These fixtures are available in one, two, three or four lights.

- Steel Body with Frosted Lens
- Brushed Nickel Finish
- 90 CRI
- ETL - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		W	D	H
82061-SU	LFX/WS/1L/10W/D/E/30K	10	600	120	3000K	30000	✓	✓	6.9"	2.8"	4.2"
82062-SU	LFX/WS/2L/20W/D/E/30K	20	1200	120	3000K	30000	✓	✓	14.9"	2.8"	4.2"
82063-SU	LFX/WS/3L/30W/D/E/30K	30	1800	120	3000K	30000	✓	✓	22.7"	2.8"	4.2"
82064-SU	LFX/WS/4L/40W/D/E/30K	40	2400	120	3000K	30000	✓	✓	30.7"	2.8"	4.2"

## Pendant Drum

### Wood Shade

Introducing the LED Wooden Drum Pendant Light collection from Sunlite. These beautifully designed contemporary LED Wooden Drum Light Pendants will enhance any room in a home or lounge with its smooth finish and soft light. These fixtures are maintenance free thanks to the long lifespan of the pre-installed LED light engine.

- Wood Body with White Lens
- Brushed Nickel Canopy
- 81 CRI
- ETL - Damp Location



### Applications



Residential



Retail



Hospitality

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
88726-SU	LFX/WC/PD/D/13W/C	13	600	120	3000K	35000	✓	-	9.0"	12.3"
88724-SU	LFX/WC/PD/D/13W/S	13	600	120	3000K	35000	✓	-	7.0"	19.8"

## Decorative Pendant Mount

### Industrial Style

The Sunlite LED Utility Ceiling Shade Fixture is constructed from iron. Its industrial style combines the look of yesteryear with the modern day LED technology of today, fusing the past and the present to bring you the ultimate in design and style. It serves as a visual sensation in any application it's installed in and complements the room décor. Built to last 35,000 hours, the pendant fixture will stand the test of time. Available in both black and white finishes.

- Iron Body with Wire Guard Lens
- 81 CRI
- ETL Listed - Damp Location
- 3000K Color Temperature



### Applications



Commercial



Retail



Hospitality



Medical

Item#	Description	Watt	Lumen	Volt	Finish	Hours	Dim		DIA	H
88107-SU	LFX/CS/WH/E/D/30K	15	900	120	White	50000	✓	✓	12.2"	9.0"
88108-SU	LFX/CS/BL/E/D/30K	15	900	120	Black	50000	✓	✓	12.2"	9.0"



## Decorative LED Pendant Mount

### Designer Glass Shade

The Sunlite designers glass LED pendant Collection features exquisite designs. Each pendant is meticulously crafted to provide high quality lighting. Every pendant features a unique stunning design that complements any room's interior. The pendants seamlessly integrate the latest and most efficient energy saving LED technology.

- Steel Canopy with Designer Glass Shade
- Brushed Nickel Finish
- 81 CRI
- ETL Listed
- 120 Volts
- 3000K Color Temperature
- 6 Foot Cord



### Applications



Residential



Retail



Hospitality

Img#	Item#	Description	Watt	Lumen	Lens	Hours	Dim		DIA	H
1	88710-SU	LFX/DSG/PD/D/9W/VEN	9	800	Venice	50000	✓	-	4.8"	9.0"
2	88706-SU	LFX/DSG/PD/D/9W/TOK	9	800	Tokyo	50000	✓	-	4.8"	11.0"
3	88708-SU	LFX/DSG/PD/D/9W/BRU	9	800	Brussels	50000	✓	-	4.8"	11.0"
4	88700-SU	LFX/DSG/PD/D/9W/MAN	9	800	Manila	50000	✓	-	5.5"	11.5"
5	88704-SU	LFX/DSG/PD/D/9W/SAH	9	800	Sahara	50000	✓	-	4.8"	11.0"
6	88714-SU	LFX/DSG/PD/D/9W/JUN	9	800	Juneau	50000	✓	-	4.8"	11.0"
7	88716-SU	LFX/DSG/PD/D/9W/BUD	9	800	Budapest	50000	✓	-	4.8"	11.0"
8	88718-SU	LFX/DSG/PD/D/9W/AMS	9	800	Amsterdam	50000	✓	-	4.8"	11.0"
9	88702-SU	LFX/DSG/PD/D/9W/ANT	9	800	Antarctica	50000	✓	-	5.5"	12.0"

## UFO Fixtures

### Colored Pendant Fixture

- Durable 3' Threaded Cord
- UL Listed

Sunlite's colorful pendant light fixtures are your go to for a bright and fun fixture to compliment any kitchen island counter, dining room and more. Choose the color that best suits your space and watch this fixture perfectly blend into its surroundings while adding that extra piece of style.



Item#	Description	Finish	L
80758-SU	CO/PD/BL	Blue	36.0"
80759-SU	CO/PD/PK	Pink	36.0"
80760-SU	CO/PD/WH	White	36.0"

### Applications



Residential



Commercial

## UFO Bulbs

### Colored Pendant Bulbs

Add some uniqueness to your home and employ Sunlite's UFO bulbs that will perfectly complement any compatible light fixture at your home, cafe and even office space

- Medium (E26) Base
- 80 CRI
- UL Listed - Damp Location
- 6 Bulbs Per Case



Item#	Description	Watt	Lumen	Volt	Color	Hours	Finish	Dim		DIA	H
80768-SU	UFO/LED/15W/30K/CH/ACRYLIC	15	1100	120	3000K	25000	Wh/Sl	-	-	9.0"	2.6"
80762-SU	UFO/LED/7W/30K/BLUE	7	550	120	3000K	25000	Blue	-	-	3.7"	2.5"
80763-SU	UFO/LED/7W/30K/PINK	7	550	120	3000K	25000	Pink	-	-	3.7"	2.5"
80764-SU	UFO/LED/11W/30K/BLUE	11	800	120	3000K	25000	Blue	-	-	4.7"	2.6"
80765-SU	UFO/LED/11W/30K/PINK	11	800	120	3000K	25000	Pink	-	-	4.7"	2.6"
80766-SU	UFO/LED/15W/30K/BLUE	15	1250	120	3000K	25000	Blue	-	-	5.3"	3.0"
80767-SU	UFO/LED/15W/30K/PINK	15	1250	120	3000K	25000	Pink	-	-	5.3"	3.0"



# 8 Inch Downlights

## Commercial Series

The MKS 8" LED Recessed Downlight for new construction is a high-performance Commercial LED Downlight with rugged craftsmanship and superior performance. The MKS 8" Downlights are IC rated (in new construction applications), fully dimmable and carry the E.T.L. Certification. Butterfly and hanging arms included.

- Rugged Die-Cast
- 80 CRI
- ETL Listed
- 0-10V Dimming



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	L	W	H
89912-MKS	MKS/8/NDL	45	3200	120-277	3000K	50000	✓	15.8	13.4"	7.5"
89913-MKS	MKS/8/NDL	45	4000	120-277	4000K	50000	✓	15.8	13.4"	7.5"

# Eyeball Downlight Retrofit Kits

## Adjustable

Sunlite's eyeball adjustable LED downlight is the perfect retrofit option where directional light is needed. It's flexibility allows you to achieve illumination on a wall feature or artwork from a recessed ceiling application.

- 80 CRI
- ETL Listed - Damp Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	IC	L	W	H
82081-SU	LFX/EDL/4R/10W/D/E/30K	10	750	120	3000K	30000	✓	✓	4.1"	4.1"	2.0"



## Die-Cast Retrofit Kits

Premium Design

Sunlite offers a die-cast on a sleek, hybrid LED retrofit. This thermally managed, aluminum heat sink construction allows for high end performance from a retrofit unit. This hybrid style fixture allows for multiple trim options from one single light engine.

- Aluminum Body and Trim with Frosted Lens
- Brushed Nickel, Bronze or White Finish
- 90 CRI
- ETL Listed - Damp Location



### Applications



Residential



Commercial



Retail



Office



Hospitality



Medical



Education

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
99010-CMP	MKS/RF/27K/ETL/ES/TRIAC	9	550	120	2700K	50000	✓	✓		

### Trims



99210-MKS  
MKS/RFT/W/4INCH



99215-MKS  
MKS/RFT/BN/4INCH




99218-MKS  
MKS/RFT/BRZ/4INCH



99211-MKS  
MKS/TRIM



99214-MKS  
MKS/TRIM



99216-MKS  
MKS/TRIM

# Downlight Retrofit Kits

## Square Trim

Retrofit your space with our LED retrofit downlight kit. Developed utilizing the latest in LED technology, with a lifetime of 50,000 hours, it is sure to stand the test of time. Featuring a 3000K and 4000K color temperature, giving your space a homey feel. UL listed for damp locations, it can be installed indoor or outdoor and will stand against the elements.

- Die-Cast Heat Sink with Plastic Trim
- White Finish
- 80 CRI
- ETL Listed - Damp Location



### Applications



Residential



Commercial



Retail



Office



Hospitality



Medical



Education



### Item#

### Description

### Watt

### Lumen

### Volt

### Color

### Hours

### Dim



### L

### W

### H

#### 4" Square | Slim

89123-SU	LFX/RDL/4S/9W/DIM/30K	9	590	120	3000K	50000	✓	✓	5.0"	5.0"	1.3"
89124-SU	LFX/RDL/4S/9W/DIM/40K	9	630	120	4000K	50000	✓	✓	5.0"	5.0"	1.3"

#### 4" Square

89277-SU	LFX/RDL/4S/10W/D/E/30K	10	700	120	3000K	50000	✓	✓	4.9"	4.9"	2.7"
89278-SU	LFX/RDL/4S/10W/D/E/40K	10	700	120	4000K	50000	✓	✓	4.9"	4.9"	2.7"
89279-SU	LFX/RDL/4S/10W/D/E/50K	10	700	120	5000K	50000	✓	✓	4.9"	4.9"	2.7"

#### 5-6" Square

89126-SU	LFX/RDL/5/6S/15W/DIM/30K	15	1050	120	3000K	50000	✓	✓	7.5"	7.5"	2.8"
89127-SU	LFX/RDL/5/6S/15W/DIM/40K	15	1130	120	4000K	50000	✓	✓	7.5"	7.5"	2.8"



# Downlight Retrofit Kits

## Round Trim

- Die-Cast Heat Sink with Plastic Trim
- White Finish
- Baffle Option Available
- 80 CRI
- ETL/UL Listed

5  
Year  
Warranty




G24Q Base



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	 DIA	H
<b>3" Round   Wet Location   90 CRI</b>									
89275-SU	LFX/RDL/3R/10W/E/D/E26/30K	10	600	120	3000K	50000	✓	✓	4.0"   2.5"
<b>4" Round   Wet Location</b>									
89300-SU	LFX/RDL/4R/10W/E/D/30K	10	800	120	3000K	50000	✓	✓	5.1"   1.8"
89301-SU	LFX/RDL/4R/10W/E/D/40K	10	830	120	4000K	50000	✓	✓	5.1"   1.8"
89302-SU	LFX/RDL/4R/10W/E/D/50K	10	860	120	5000K	50000	✓	✓	5.1"   1.8"
<b>5-6" Round   Wet Location</b>									
89303-SU	LFX/RDL/5/6R/14W/E/D/30K	14	1100	120	3000K	50000	✓	✓	7.4"   1.9"
89304-SU	LFX/RDL/5/6R/14W/E/D/40K	14	1130	120	4000K	50000	✓	✓	7.4"   1.9"
89305-SU	LFX/RDL/5/6R/14W/E/D/50K	14	1160	120	5000K	50000	✓	✓	7.4"   1.9"
<b>G24Q Base   5-6" Round   Damp Location</b>									
89272-SU	LFX/RDL/G24Q/IS/5/6R/15W/27K	15	1000	120	2700K	35000	-	✓	7.5"   3.5"

### 4" Fixture Trims | 6" Fixture Trims




50110-SU  
TRIM/4R/BN



50111-SU  
TRIM/4R/BR



50112-SU  
TRIM/4R/BL



50113-SU  
TRIM/6R/BN



50114-SU  
TRIM/6R/BR



50115-SU  
TRIM/6R/BL




# Indirect Low Profile Downlight

Sunlite's indirect slim downlights offer a glare free light fixture with an elegant design. The hidden LEDs allow for flawless light distribution to evenly illuminate your space.

- Die-Cast Heat Sink with Plastic Trim
- White Finish
- 80 CRI
- ETL Listed - Damp Location
- No Housing Required



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
<b>4" and 6" Square</b>											
82069-SU	LFX/IDL/4S/9W/D/30K	9	450	120	3000K	30000	✓	-	4.7"	4.7"	2.2"
82070-SU	LFX/IDL/6S/12W/D/30K	12	650	120	3000K	30000	✓	-	6.7"	6.7"	2.2"
<b>4" and 6" Round</b>											
82067-SU	LFX/IDL/4R/9W/D/30K	9	450	120	3000K	30000	✓	-	4.7"	4.7"	2.2"
82068-SU	LFX/IDL/6R/12W/D/30K	12	650	120	3000K	30000	✓	-	6.7"	6.7"	2.2"

# Ultra Slim Downlights

Sunlite introduces a slim downlight with innovative technology that provides downlight lighting without all the labor.

- Die-Cast Heat Sink with Plastic Trim
- White Finish
- 80 CRI
- ETL Listed - Damp Location
- No Housing Required



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
<b>Square</b>											
82075-SU	LFX/SDL/4S/10W/D/E/30K	10	650	120	3000K	30000	✓	✓	4.7"	4.7"	0.9"
82076-SU	LFX/SDL/6S/12W/D/E/30K	12	850	120	3000K	30000	✓	-	6.8"	6.8"	0.9"
<b>Round</b>											
82073-SU	LFX/SDL/4R/10W/D/E/30K	10	650	120	3000K	30000	✓	✓	4.7"	4.7"	0.9"
82074-SU	LFX/SDL/6R/12W/D/E/30K	12	850	120	3000K	30000	✓	✓	6.7"	6.7"	0.9"





## Bathroom Vanity

### Triple Band

Sunlite's LED bathroom vanity offers a classic design with the latest in LED technology to upgrade your bathrooms' ambiance.

- Steel Body with Acrylic Lens
- Brushed Nickel Finish
- 81 CRI
- ETL - Damp Location
- Wall Mounted



Available



### Applications



Residential



Commercial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
49072-SU	LFX/VF/24/24W/BN/E/30K	24	1680	120-277	3000K	50000	-	✓	24.0"	5.5"	6.0"
49087-SU	LFX/VF/24/24W/BN/E/40K	24	1710	120-277	4000K	50000	-	✓	24.0"	5.5"	6.0"
49073-SU	LFX/VF/36/28W/BN/E/30K	28	2000	120-277	3000K	50000	-	✓	36.0"	5.5"	6.0"
49089-SU	LFX/VF/36/28W/BN/E/40K	28	2030	120-277	4000K	50000	-	✓	36.0"	5.5"	6.0"
49074-SU	LFX/VF/48/35W/BN/E/30K	35	2500	120-277	3000K	50000	-	✓	48.0"	5.5"	6.0"
49088-SU	LFX/VF/48/35W/BN/E/40K	35	2530	120-277	4000K	50000	-	✓	48.0"	5.5"	6.0"

## Bathroom Vanity

### Double Band

- Steel Body with Acrylic Lens
- Brushed Nickel Finish
- 80 CRI
- ETL - Damp Location
- Wall Mounted



Available



### Applications



Residential

Commercial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
<b>24" Length</b>											
49139-SU	LFX/VF/24"/28W/BN/E/30K	28	2520	120	3000K	50000	✓	✓	24.8"	5.0"	5.4"
49140-SU	LFX/VF/24"/28W/BN/E/40K	28	2550	120	4000K	50000	✓	✓	24.8"	5.0"	5.4"
<b>36" Length</b>											
49141-SU	LFX/VF/36"/36W/BN/E/30K	36	3060	120	3000K	50000	✓	✓	36.7"	5.0"	5.4"
49142-SU	LFX/VF/36"/36W/BN/E/40K	36	3090	120	4000K	50000	✓	✓	36.7"	5.0"	5.4"
<b>48" Length</b>											
49143-SU	LFX/VF/48"/48W/BN/E/30K	48	4200	120	3000K	50000	✓	✓	48.8"	5.0"	5.4"
49144-SU	LFX/VF/48"/48W/BN/E/40K	48	4230	120	4000K	50000	✓	✓	48.8"	5.0"	5.4"

## Bathroom Vanity

### Modern Light Bar

- Steel Body with Acrylic Lens
- Chrome Finish
- 80 CRI
- ETL - Damp Location
- Wall Mounted



### Applications



Residential

Commercial

Hospitality

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
81160-SU	LFX/BAR/20W/30K/18"/CH/D/ACRYL	20	1100	120	3000K	50000	✓	-	18.5"	3.5"	4.0"
81171-SU	LFX/BAR/20W/40K/18"/CH/D/ACRYL	20	1100	120	4000K	50000	✓	-	18.5"	3.5"	4.0"




## Under Cabinet

### Linkable Plug-in

Sunlite's under cabinet fixture adds ambient lighting in kitchens and closets. These linkable fixtures can be installed in any configuration.

- Plastic Body with White Lens and White Finish
- 80 CRI
- ETL Listed
- Available in 3500K and 5000K Options
- 5' Power Cord and 9" Linkable Cable Included

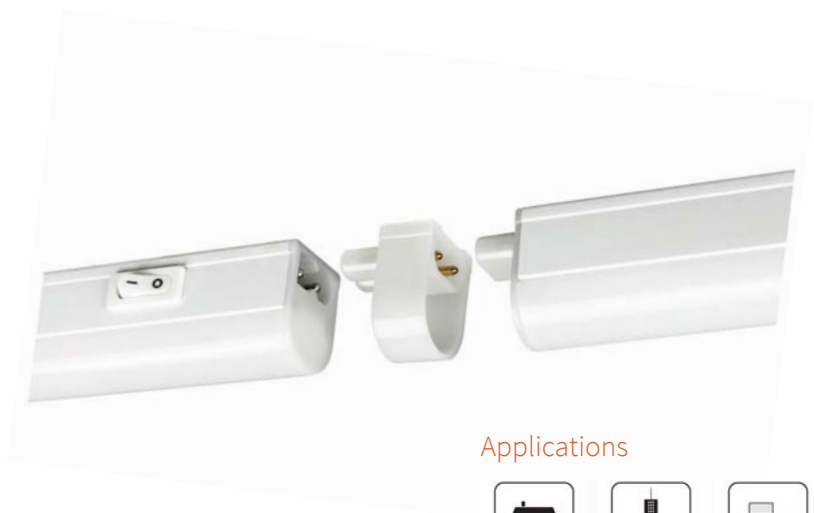

### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
<b>12" Length</b>											
53071-SU	LFX/UC/12/4W/30K	4	300	120	3000K	35000	-	-	12.0"	1.0"	1.5"
53080-SU	LFX/UC/12/4W/40K	4	315	120	4000K	35000	-	-	12.0"	1.0"	1.5"
<b>22.5" Length</b>											
53072-SU	LFX/UC/22/8W/30K	8	600	120	3000K	35000	-	-	22.5"	1.0"	1.5"
53083-SU	LFX/UC/22/8W/40K	8	615	120	4000K	35000	-	-	22.5"	1.0"	1.5"
<b>34" Length</b>											
53073-SU	LFX/UC/34/10W/30K	10	750	120	3000K	35000	-	-	34.0"	1.0"	1.5"
53086-SU	LFX/UC/34/10W/40K	10	780	120	4000K	35000	-	-	34.0"	1.0"	1.5"
<b>46" Length</b>											
53074-SU	LFX/UC/46/14W/30K	14	1050	120	3000K	35000	-	-	46.0"	1.0"	1.5"
53089-SU	LFX/UC/46/14W/40K	14	1100	120	4000K	35000	-	-	46.0"	1.0"	1.5"

## Under Cabinet

### Hard Wire

- Aluminum Body with White Lens
- Black Finish
- 90 CRI
- ETL Listed



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
53077-SU	LFX/UC/HW/30K/90CRI/BK	6	300	120	3000K	50000	✓	-	6.0"	1.0"	3.5"
53076-SU	LFX/UC/HW/30K/90CRI/BK	8	400	120	3000K	50000	✓	-	12.0"	1.0"	3.5"





## Ultra Thin Adjustable Under Cabinet

Low Profile

- 24 Volts
- Metal and Plastic Material
- Frost Lens
- UL Listed



### Applications



Residential



Commercial




Retail



Office



Hospitality

Item#	Description	Watt	Lumen	Color	Hours	Dim		L	W	H
88615-MKS	MKS/UC/12"/5W/24V/30K	5	300	3000K	50000	✓	—	12.0"	1.5"	0.2"
88616-MKS	MKS/UC/12"/5W/24V/40K	5	300	4000K	50000	✓	—	12.0"	1.5"	0.2"
88619-MKS	MKS/UC/20"/8W/24V/30K	8	480	3000K	50000	✓	—	20.0"	1.5"	0.2"
88620-MKS	MKS/UC/20"/8W/24V/40K	8	480	4000K	50000	✓	—	20.0"	1.5"	0.2"
88623-MKS	MKS/UC/40"/15W/24V/30K	15	900	3000K	50000	✓	—	40.0"	1.5"	0.2"
88624-MKS	MKS/UC/40"/15W/24V/40K	15	900	4000K	50000	✓	—	40.0"	1.5"	0.2"



# Components




88630-MKS  
Linear Connector




88633-MKS  
Hardwire Connector



88638-MKS  
Master On-Off  
Switch

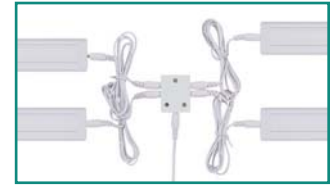

88634-MKS  
4-Way Power  
Splitter

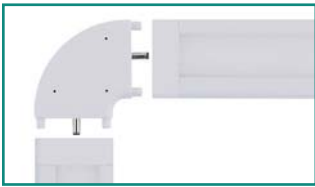

88631-MKS  
Corner Horizontal L  
Shape Connector



88642-MKS  
Dimmer



88639-MKS  
Infrared Sensor



88635-MKS  
8-Way Power  
Splitter



88632-MKS  
Corner Vertical L  
Shape Connector



88641-MKS  
Touch Dimmer



88640-MKS  
Motion Sensor



88636-MKS  
Cable Connector

# Drivers

Item#	Description	Watt
88643-MKS	MKS/UC 6W POWER SUPPLY W/PLUG	6
88644-MKS	MKS/UC 12W POWER SUPPLY W/PLUG	12
88645-MKS	MKS/UC 24W POWER SUPPLY W/PLUG	24
88646-MKS	MKS/UC 36W POWER SUPPLY W/PLUG	36
88647-MKS	MKS/UC 6W POWER SUPPLY HARDWIRE	6
88648-MKS	MKS/UC 12W POWER SUPPLY HARDWIRE	12
88649-MKS	MKS/UC 24W POWER SUPPLY HARDWIRE	24
88650-MKS	MKS/UC 36W POWER SUPPLY HARDWIRE	36



88637-MKS  
Adjustable  
Mounting Clip (Pair)



# Linear Surface Mount

## Strip

Sunlite brings to you a compact and sleek design with its linear LED surface mount strip. It can provide a crisp light output to any BOH, hallway, staircase and industrial setting.

- Steel Body with Frosted Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location



Available



### Applications



Commercial

Industrial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
<b>2' Length</b>											
85350-SU	LFX/EC/2'/20W/MV/D/DLC/35K	20	2348	120-277	3500K	50000	✓	✓	24.0"	3.4"	3.6"
85210-SU	LFX/EC/2'/20W/MV/D/DLC/40K	20	2600	120-277	4000K	50000	✓	✓	24.0"	3.4"	3.6"
85351-SU	LFX/EC/2'/20W/MV/D/DLC/50K	20	2432	120-277	5000K	50000	✓	✓	24.0"	3.4"	3.6"
<b>3' Length</b>											
85355-SU	LFX/EC/3'/25W/MV/D/DLC/35K	25	3129	120-277	3500K	50000	✓	✓	36.0"	3.4"	3.6"
85211-SU	LFX/EC/3'/25W/MV/D/DLC/40K	25	3250	120-277	4000K	50000	✓	✓	36.0"	3.4"	3.6"
85356-SU	LFX/EC/3'/25W/MV/D/DLC/50K	25	3334	120-277	5000K	50000	✓	✓	36.0"	3.4"	3.6"
<b>4' Length</b>											
85360-SU	LFX/EC/4'/23W/MV/D/DLC/35K	23	2746	120-277	3500K	50000	✓	✓	48.0"	3.4"	3.6"
85188-SU	LFX/EC/4'/23W/MV/D/DLC/40K	23	2990	120-277	4000K	50000	✓	✓	48.0"	3.5"	3.5"
85361-SU	LFX/EC/4'/23W/MV/D/DLC/50K	23	2989	120-277	5000K	50000	✓	✓	48.0"	3.4"	3.6"
<b>4' Length   High Output</b>											
85362-SU	LFX/EC/4'/40W/MV/D/DLC/35K	40	4928	120-277	3500K	50000	✓	✓	48.0"	3.4"	3.6"
85189-SU	LFX/EC/4'/40W/MV/D/DLC/40K	40	5200	120-277	4000K	50000	✓	✓	48.0"	3.5"	3.5"
85363-SU	LFX/EC/4'/40W/MV/D/DLC/50K	40	5240	120-277	5000K	50000	✓	✓	48.0"	3.4"	3.6"
<b>8' Length</b>											
85365-SU	LFX/EC/8'/75W/MV/D/DLC/35K	75	9600	120-277	3500K	50000	✓	✓	96.0"	3.4"	3.6"
85190-SU	LFX/EC/8'/75W/MV/D/DLC/40K	75	9750	120-277	4000K	50000	✓	✓	96.0"	3.5"	3.5"
85366-SU	LFX/EC/8'/75W/MV/D/DLC/50K	75	9825	120-277	5000K	50000	✓	✓	96.0"	3.4"	3.6"

# Linear Shop Light

Traditional Design

The Sunlite Shop light uses the latest technology to a traditional style fixture to provide ideal lighting to a garage or industrial setting. It comes with plug-in and pull chain option. It can be mounted pendant or surface mount.

- Aluminum Body with Open Lens
- White Finish
- 80 CRI
- ETL - Damp Location
- 18" Pull-chain
- Chain and Hook to hang



Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
04692-SU	LFX/SHOP/48W/E/W	48	4000	120	4000K	50000	-	✓	48.0"	4.5"	1.9"

# Outdoor Linear Shop Light

Traditional Design

- Light Weight Poly Body with Frosted Lens
- White Finish
- 80 CRI
- ETL - Wet Location
- 18" Pull-chain



Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
85315-SU	LFX/SHOP/37W/IP65/40K	37	4200	120	4000K	35000	-	-	46.6"	4.1"	3.0"



# Wraparound

## Modern Design

Sunlite's wraparound light fixtures feature a durable aluminum housing that facilitates a quick and easy installation process. These flush mount fixtures are perfect for ceiling and wall applications in a wide array of settings.

- Aluminum Body with Frosted Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location



### Applications



Residential



Commercial



Industrial



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
85287-SU	LFX/WA7/4'/48W/30K	48	4000	120	3000K	50000	-	-	48.0"	6.5"	2.5"
85169-SU	LFX/WA7/4'/48W/40K	48	4000	120	4000K	50000	-	✓	48.0"	6.5"	2.5"

# Designer Linear Surface Mount

## Modern Design

- Aluminum Body with Frosted Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location



### Applications



Residential



Commercial



Industrial



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
85286-SU	LFX/4'/40W/MV/30K	40	4200	120-277	3000K	50000	-	✓	48.0"	5.5"	2.5"
85168-SU	LFX/4'/40W/MV/40K	40	4200	120-277	4000K	50000	-	-	48.0"	5.5"	2.5"

# Commercial Vapor Tight

## Linear Flush Mount

Do away with your older inefficient lamps and modernize with Sunlite's 4' wet location ready LED weathertight fixtures that are built with outdoor usage and energy saving at the forefront.

- Plastic Body with White Lens
- White Finish
- 80 CRI
- UL Listed - Wet Location



### Applications



Commercial



Industrial



Medical



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
85257-SU	LFX/VTS/4'/40W/MV/40K	40	4200	120-277	4000K	50000	-	✓	48.0"	5.0"	3.5"





## Linear Bed Light

Hospital Series

Sunlite's over bed fixtures are fabricated with your patient and medical staff in mind. This light bar creates a potent, but comfortable environment that avoids disrupting others nearby, while providing enough light to read medical records, books and maneuver around during all hours of the day.

- Plastic Body with White Lens
- White Finish
- 80 CRI
- UL Listed
- Dual Light Setting



Application



Medical

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
49109-SU	LFX/BL/22W-44W/30K	22-44	2310-4620	120	3000K	50000	-	-	48.0"	5.7"	4.8"
49110-SU	LFX/BL/22W-44W/40K	22-44	2310-4620	120	4000K	50000	-	✓	48.0"	5.7"	4.8"



# Corridor & Stairway Fixture

## Wall Bracket

Sunlite's corridor and stairway fixtures utilize the latest technology and traditional design. With easy installation kept in mind these make for a great common area fixture.

- Steel Body with Opal Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location



Available

### Applications



Commercial

Industrial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
<b>2 Feet</b>											
82085-SU	LFX/BB213/2FT/25W/30K	25	3000	120-277	3000K	50000	✓	*	24.4"	3.6"	4.3"
82086-SU	LFX/BB213/2FT/25W/40K	25	3080	120-277	4000K	50000	✓	*	24.4"	3.6"	4.3"
<b>Emergency Battery Backup</b>											
82091-SU	LFX/BB213/2FT/25W/30K/EM	25	3000	120-277	3000K	50000	✓	*	24.4"	3.6"	4.3"
82092-SU	LFX/BB213/2FT/25W/40K/EM	25	3080	120-277	4000K	50000	✓	*	24.4"	3.6"	4.3"
<b>4 Feet</b>											
82088-SU	LFX/BB213/4FT/40W/30K	40	4800	120-277	3000K	50000	✓	*	46.6"	3.6"	4.3"
82089-SU	LFX/BB213/4FT/40W/40K	40	4890	120-277	4000K	50000	✓	*	46.6"	3.6"	4.3"
<b>Emergency Battery Backup</b>											
82094-SU	LFX/BB213/4FT/40W/30K/EM	40	4800	120-277	3000K	50000	✓	*	46.6"	3.6"	4.3"
82095-SU	LFX/BB213/4FT/40W/40K/EM	40	4890	120-277	4000K	50000	✓	*	46.6"	3.6"	4.3"

\* DLC Pending

# Full Collection of Antique Fixtures & LED Bulbs

Available in our new catalogs



Contact our sales department for a free catalog

or download at [sunlite.com](http://sunlite.com)

# Slim Linear Surface Mount Strip

Single & Double Light Design

Sunlite's Slim linear LED surface mount is an ideal economical light fixture to be installed in any BOH, hallway or garage. It has the conventional design with latest LED technology.

- Aluminum Body with White Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location



Available



## Applications



Commercial

Industrial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
<b>2 Foot - 1 Light</b>											
85400-SU	LFX/ST/2FT/1L/10W/30K	10	1480	120-277	3000K	30000	-	✓	24.0"	1.8"	2.2"
85401-SU	LFX/ST/2FT/1L/10W/40K	10	1500	120-277	4000K	30000	-	✓	24.0"	1.8"	2.2"
85402-SU	LFX/ST/2FT/1L/10W/50K	10	1520	120-277	5000K	30000	-	✓	24.0"	1.8"	2.2"
<b>2 Foot - 2 Light</b>											
85406-SU	LFX/ST/2FT/2L/15W/30K	15	2180	120-277	3000K	30000	-	✓	24.0"	3.5"	2.2"
85407-SU	LFX/ST/2FT/2L/15W/40K	15	2200	120-277	4000K	30000	-	✓	24.0"	3.5"	2.2"
85408-SU	LFX/ST/2FT/2L/15W/50K	15	2220	120-277	5000K	30000	-	✓	24.0"	3.5"	2.2"
<b>4 Foot - 1 Light</b>											
85403-SU	LFX/ST/4FT/1L/15W/30K	15	2080	120-277	3000K	30000	-	✓	48.0"	1.8"	2.2"
85404-SU	LFX/ST/4FT/1L/15W/40K	15	2100	120-277	4000K	30000	-	✓	48.0"	1.8"	2.2"
85405-SU	LFX/ST/4FT/1L/15W/50K	15	2120	120-277	5000K	30000	-	✓	48.0"	1.8"	2.2"
<b>4 Foot - 2 Light</b>											
85409-SU	LFX/ST/4FT/2L/30W/30K	30	4180	120-277	3000K	30000	-	✓	48.0"	3.5"	2.2"
85410-SU	LFX/ST/4FT/2L/30W/40K	30	4200	120-277	4000K	30000	-	✓	48.0"	3.5"	2.2"
85411-SU	LFX/ST/4FT/2L/30W/50K	30	4220	120-277	5000K	30000	-	✓	48.0"	3.5"	2.2"

# Flat Panel

Sunlite's LED flat panels are usually used to replace 2X2, 1X4 and 2X4 fluorescent fixtures. It's slim design is a easy installation to lay in drop ceilings.

- Aluminum Body with White Lens
- White Trim Finish
- 80 CRI
- UL Listed
- Flicker Free



## Applications



Available



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
<b>2X2 Option</b>											
85191-SU	LFX/2X2/40W/DLC/30K	40	4000	120-277	3000K	50000	✓	✓	24.0"	24.0"	1.8"
85371-SU	LFX/2X2/40W/DLC/35K	40	4130	120-277	3500K	50000	✓	✓	24.0"	24.0"	1.8"
85372-SU	LFX/2X2/40W/DLC/40K	40	4220	120-277	4000K	50000	✓	✓	24.0"	24.0"	1.8"
85373-SU	LFX/2X2/40W/DLC/50K	40	4340	120-277	5000K	50000	✓	✓	24.0"	24.0"	1.8"
85374-SU	LFX/2X2/40W/65K	40	4510	120-277	6500K	50000	✓	-	24.0"	24.0"	1.8"
<b>2X4 Option</b>											
85196-SU	LFX/2X4/60W/DLC/30K	60	6000	120-277	3000K	50000	✓	✓	48.0"	24.0"	2.5"
85381-SU	LFX/2X4/60W/DLC/35K	60	6140	120-277	3500K	50000	✓	✓	48.0"	24.0"	2.5"
85382-SU	LFX/2X4/60W/DLC/40K	60	6220	120-277	4000K	50000	✓	✓	48.0"	24.0"	2.5"
85383-SU	LFX/2X4/60W/DLC/50K	60	6320	120-277	5000K	50000	✓	✓	48.0"	24.0"	2.5"
85384-SU	LFX/2X4/60W/65K	60	6410	120-277	6500K	50000	✓	-	48.0"	24.0"	2.5"
<b>1X4 Option</b>											
85170-SU	LFX/1X4/40W/DLC/30K	40	4000	120-277	3000K	50000	✓	✓	48.0"	12.0"	2.5"
85171-SU	LFX/1X4/40W/DLC/35K	40	4130	120-277	3500K	50000	✓	✓	48.0"	12.0"	2.5"
85172-SU	LFX/1X4/40W/DLC/40K	40	4220	120-277	4000K	50000	✓	✓	48.0"	12.0"	2.5"
85173-SU	LFX/1X4/40W/DLC/50K	40	4340	120-277	5000K	50000	✓	✓	48.0"	12.0"	2.5"

### Surface Mounting

85146-SU	LFX/FLAT/1X4/KIT	White
85148-SU	LFX/FLAT/2X2	White
85149-SU	LFX/FLAT/2X4	White

### Recessed Mounting

85081-SU	LFX/FLAT/1X4	Silver
85082-SU	LFX/FLAT/2X2	Silver
85083-SU	LFX/FLAT/2X4	Silver

### Suspension Kit

85124-SU	LFX/FLAT/2X2/1X4
85129-SU	LFX/FLAT/2X4

# Recessed Troffer

## Center Basket

Sunlite is providing a center basket fixture using the latest technology with a fresh and clean design to help illuminate any commercial application.

- Steel Body with frosted Lens
- White Finish
- 80 CRI
- UL Listed



Available



Available



### Applications



Residential



Commercial



Retail



Industrial



Office



Hospitality



Medical



Education

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
<b>2X2 Option</b>											
85135-SU	LFX/2X2/30W/35K	30	3750	120-277	3500K	50000	✓	✓	24.0"	24.0"	3.0"
85136-SU	LFX/2X2/30W/40K	30	3780	120-277	4000K	50000	✓	✓	24.0"	24.0"	3.0"
<b>2X4 Option</b>											
85142-SU	LFX/2X4/34W/35K	34	4280	120-277	3500K	50000	✓	✓	48.0"	24.0"	3.0"
85143-SU	LFX/2X4/34W/40K	34	4280	120-277	4000K	50000	✓	✓	48.0"	24.0"	3.0"
85157-SU	LFX/2X4/56W/35K	56	6888	120-277	3500K	50000	✓	✓	48.0"	24.0"	3.0"
85158-SU	LFX/2X4/56W/40K	56	7000	120-277	4000K	50000	✓	✓	48.0"	24.0"	3.0"
<b>Accessories</b>											
85138-SU	2X2 LED Troffer Drywall Flange Kit								25.3"	25.3"	1.5"
85139-SU	2X4 LED Troffer Drywall Flange Kit								49.3"	25.3"	1.5"



MKSLED.COM

FULL COLLECTION OF

# LED DOWNLIGHTS

REMODEL/ NEW CONSTRUCTION



DIMMABLE



MS Downlights

# Commercial High Bay

## Linear Design

- Steel Body with Diffused Lens
- White Finish
- 80 CRI
- UL Listed - Damp Location



5  
Year  
Warranty



Battery  
Backup

Available



Dimmable



Motion  
Sensor

Available



### Applications



Commercial



Industrial

Item#	Description	Watt	Lumen	Volt	Color	Dim	DLC	L	W	H
85282-SU	LFX/HB/2FT/13"W/90W/DLC/D/MV/50K	90	11700	120-277	5000K	✓	✓	24.0"	13.0"	4.5"
85283-SU	LFX/HB/2FT/17"W/135W/DLC/D/MV/50K	135	17550	120-277	5000K	✓	✓	24.0"	17.0"	4.5"
85284-SU	LFX/HB/4FT/13"W/178W/DLC/D/MV/50K	178	23140	120-277	5000K	✓	✓	48.0"	13.0"	4.5"

#### 85282-SU COMPONENTS



30571-SU	Pendant Mounting
30570-SU	V Hook Mounting
30572-SU	Surface Mounting
30575-SU	Wireguard

#### 85283-SU COMPONENTS


30571-SU	Pendant Mounting
30578-SU	V Hook Mounting
30573-SU	Surface Mounting
30576-SU	Wireguard

#### 85284-SU COMPONENTS

30571-SU	Pendant Mounting
30570-SU	V Hook Mounting
30572-SU	Surface Mounting
30577-SU	Wireguard





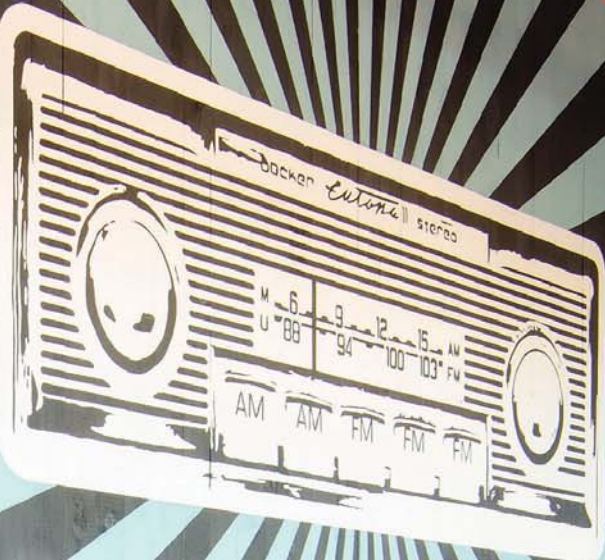

NOTCH



# Commercial High Bay

## Round Design

The LED Acrylic High Bay Pendant delivers market-leading efficacy and smooth light output for large-scale interiors such as retail stores, auto showrooms, gymnasiums, warehouses and manufacturing facilities. The pendant features cutting-edge optics and a durable acrylic reflector that deliver light with perfect uniformity and minimal glare.

- Metal Body with Aluminum Finish
- Acrylic Lens and Reflector
- 70 CRI



### Applications



Commercial



Retail



Industrial



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	DIA	H
89900-MKS	MKS/HB/120V/105W/LED/30K	105	9500	120	3000K	100000	✓	-	16"	18"
89901-MKS	MKS/HB/120V/105W/LED/40K	105	10500	120	4000K	100000	✓	-	16"	18"
89902-MKS	MKS/HB/120V/105W/LED/50K	105	11500	120	5000K	100000	✓	-	16"	18"



# Commercial UFO High Bay

Round Design

Sunlite's Highbay is the ideal vertical lighting fixture for indoor use. Ideally used to illuminate industrial and commercial applications. It improves safety and energy efficiency while enhancing productivity.

- Metal Body with Black Finish
- 70 CRI
- UL Listed - Damp Location
- Reflector and Lens Sold Separately



Housing Option  
(89598-SU | 89599-SU)



High Bay Fixture

Acrylic Reflector Option

Lens Option

## Applications



Commercial

Industrial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	DIA	H
89589-SU	LFX/HB/100W/D/50K	100	12500	120-277	5000K	50000	✓	✓	14.2"	14.2"
89590-SU	LFX/HB/150W/D/50K	150	18700	120-277	5000K	50000	✓	✓	14.2"	14.2"

### COMPONENTS

89594-SU	16 Acrylic Reflector	OR	89598-SU	Semi-Sphere 120D Housing
89566-SU	Spring Clamp 16 Lens			

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	DIA	H
89592-SU	LFX/HB/180W/D/50K	180	25000	120-277	5000K	50000	✓	✓	16.9"	16.9"
89593-SU	LFX/HB/240W/D/50K	240	30000	120-277	5000K	50000	✓	✓	16.9"	16.9"

### COMPONENTS

89595-SU	17 Acrylic Reflector	OR	89599-SU	Semi-Sphere 120D Housing
89567-SU	Spring Clamp 17 Lens			

# Step Light

Gentle Glow

The Sunlite LED Step lights provide beauty, performance and durability. Its can simply be installed in all types of wall surfaces including drywall, concrete pour or brick/masonry.

- Die Cast Aluminum Body with Diffused Lens
- White Finish
- 80 CRI
- ETL - Damp Location



## Applications



Residential



Commercial



Retail



Industrial



Office




Hospitality



Medical



Education

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
89090-SU	LFX/SL/V/3W/W/30K	3	120	120	3000K	50000	-	-	3.0"	2.0"	4.5"
89041-SU	LFX/SL/H/3W/W/30K	3	120	120	3000K	50000	-	-	5.0"	2.0"	3.0"





# Light Engine

AC Module

- 80 CRI
- Clear Finish
- ETL Listed



## Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
89106-SU	17W AC MODULE 3000K	17	1590	120	3000K	50000	✓	✓	4.3"	0.4"
89107-SU	17W AC MODULE 4000K	17	1590	120	4000K	50000	✓	✓	4.0"	0.4"
89119-SU	17W AC MODULE 5000K	17	1590	120	5000K	50000	✓	✓	4.0"	0.4"

# Light Engine

AC Module

- Clear Lens
- 90 CRI
- UL Listed - Damp Location



## Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		DIA	H
88360-SU	MODULE/LED/3"/12W/30K/D/AC	10	700	120	3000K	25000	✓	✓	3.3"	0.8"
88361-SU	MODULE/LED/3"/12W/40K/D/AC	10	700	120	4000K	25000	✓	✓	3.3"	0.8"
88362-SU	MODULE/LED/3"/12W/50K/D/AC	10	700	120	5000K	25000	✓	✓	3.3"	0.8"
88363-SU	MODULE/LED/4"/17W/30K/D/AC	17	1100	120	3000K	25000	✓	✓	4.4"	0.8"
88364-SU	MODULE/LED/4"/17W/40K/D/AC	17	1100	120	4000K	25000	✓	✓	4.4"	0.8"
88365-SU	MODULE/LED/4"/17W/50K/D/AC	17	1100	120	5000K	25000	✓	✓	4.4"	0.8"
88366-SU	MODULE/LED/6"/23W/30K/D/AC	23	1600	120	3000K	25000	✓	✓	5.8"	0.8"
88367-SU	MODULE/LED/6"/23W/40K/D/AC	23	1600	120	4000K	25000	✓	✓	5.8"	0.8"
88368-SU	MODULE/LED/6"/23W/50K/D/AC	23	1600	120	5000K	25000	✓	✓	5.8"	0.8"
88369-SU	MODULE/LED/7"/28W/30K/D/AC	28	2100	120	3000K	25000	✓	✓	7.4"	0.8"
88370-SU	MODULE/LED/7"/28W/40K/D/AC	28	2100	120	4000K	25000	✓	✓	7.4"	0.8"
88371-SU	MODULE/LED/7"/28W/50K/D/AC	28	2100	120	5000K	25000	✓	✓	7.4"	0.8"



# Strip Lights

## Single Row

Sunlite strip lights are a great product for architectural and accent lighting. It can be installed in any configuration to fit your needs.

- 80 CRI
- UL Listed



### Applications



Item#	Description	Watt	Lm/Meter	Volt	Color	Hours	Dim		L	W
<b>2216 Series Single Row</b>										
80991-SU	BZL/100W/24V/D/30K/1400LEDs/SINGLE	100	2100	24	3000-3500K	50000	✓	-	196"	0.4"
80992-SU	BZL/100W/24V/D/40K/1400LEDs/SINGLE	100	2100	24	4000-4500K	50000	✓	-	196"	0.4"
<b>2835 Series Single Row</b>										
80985-SU	BZL/110W/24V/D/30K/600LED's/SINGLE	110	1800	24	3000-3500K	50000	✓	-	196"	0.4"
80986-SU	BZL/110W/24V/D/40K/600LED's/SINGLE	110	1000	24	4000-4500K	50000	✓	-	196"	0.4"

### Single Row

#### Drivers



80970-SU  
DC Female Jacket  
Connector



80993-SU  
Meanwell Driver



80972-SU  
Desktop Power Adapter



80994-SU  
Meanwell Driver



80973-SU  
Desktop Power Adapter

### Single Row

#### Connectors



80979-SU  
Single Pigtail Wire  
Connector



80976-SU  
L Shape Connector



80980-SU  
Double End No Wire  
Connector



80977-SU  
T Shape Connector





80981-SU  
Double End Wire  
Connector



80978-SU  
X Shape Connector

# Strip Lights

Double and Triple Row

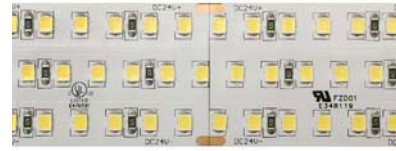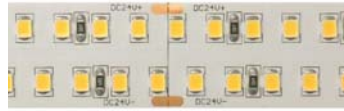

Item#	Description	Watt	Lm/Meter	Volt	Color	Hours	Dim		L	W
<b>2835 Series Double Row</b>										
80987-SU	BZL/140W/24V/D/30K/DOUBLE	140	3500	24	3000-3500K	50000	✓	-	196"	0.7"
80988-SU	BZL/140W/24V/D/40K/DOUBLE	140	3500	24	4000-4500K	50000	✓	-	196"	0.7"
<b>2835 Series Triple Row</b>										
80989-SU	BZL/180W/24V/D/30K/TRIPLE	180	4500	24	3000-3500K	50000	✓	-	196"	1.1"
80990-SU	BZL/180W/24V/D/40K/TRIPLE	180	4500	24	4000-4500K	50000	✓	-	196"	1.1"

Double Row

## Drivers



80970-SU  
DC Female Jacket  
Connector



80993-SU  
Meanwell Driver



80973-SU  
Desktop Power Adapter



80994-SU  
Meanwell Driver

Triple Row

## Driver



80994-SU  
Meanwell Driver

Single & Double Row

## Controllers




80974-SU  
RGB Touch  
Controller



80975-SU  
RGB Amplifier

## Instructions

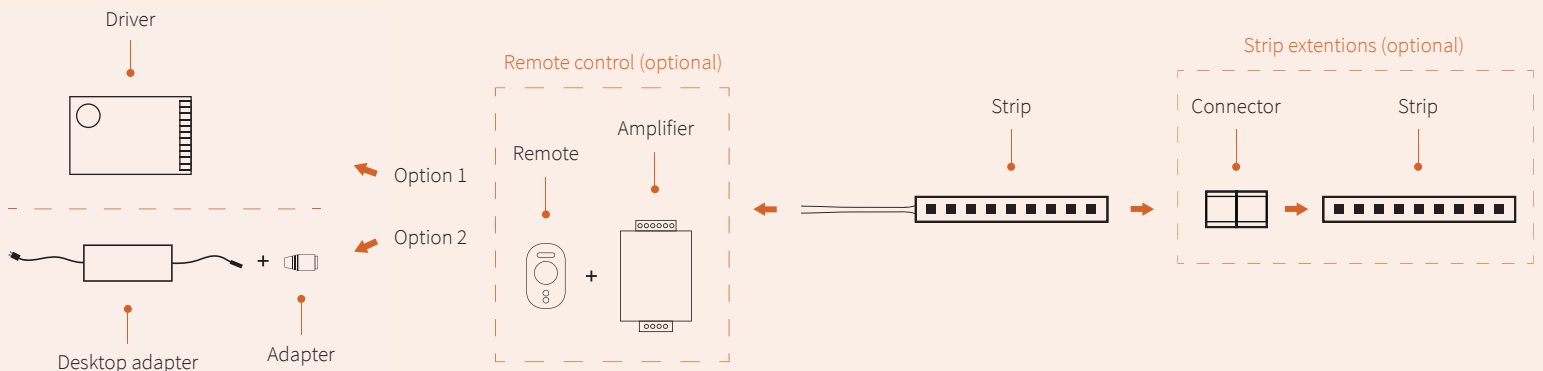



## Aluminum Strip Light Extrusions

- Aluminum Housing with Frosted Lens
- Field Cuttable



60400-SU  
AES/6.5'L/0.6D/0.6W



60401-SU  
AES/6.5'L/0.6D/0.6W



60402-SU  
AES/6.5'L/0.3D/0.6W



60403-SU  
AES/6.5'L/0.4D/0.3W



60404-SU  
AES/6.5'L/1.5D/0.9W



60405-SU  
AES/6.5'L/0.7D/3.0W



60406-SU  
AES/6.5'L/0.6D/0.7W





Outdoor





## Polycarbonate Series

### Outdoor Wall Sconce

Round and Oval Euro Design

Sunlite's decorative outdoor DOD Euro style Linear wall mounted fixtures add that extra bit of personality your outdoor setting is in need of without clashing with the landscape and other designs around it.

- Polycarbonate Body with White Lens
- 74 CRI
- UL Listed - Wet Location



#### Applications



Residential



Commercial



Landscape

Item#	Description	Watt	Lumen	Volt	Color	Hours	Finish	Dim		L	W	H
49004-SU	LFX/DOD/EL/BK/FR/40K	22	1900	120	4000K	50000	Black	✓	✓	10.0"	10.0"	5.4"
49006-SU	LFX/DOD/EL/WH/FR/40K	22	1900	120	4000K	50000	White	✓	✓	10.0"	10.0"	5.4"
49000-SU	LFX/DOD/EBL/BK/FR/40K	11.3	1000	120	4000K	50000	Black	✓	✓	11.0"	4.5"	6.0"
49002-SU	LFX/DOD/EBL/WH/FR/40K	11.3	1000	120	4000K	50000	White	✓	✓	11.0"	4.5"	6.0"



# Outdoor Wall Sconce

## Carriage Design

Sunlite's decorative outdoor Carriage Style wall mounted fixtures add that extra bit of personality your outdoor setting is in need of without clashing with the landscape and other designs around it.

- Polycarbonate Body with Acrylic Lens
- 74 CRI
- UL Listed - Wet Location



### Applications




Item#	Description	Watt	Lumen	Volt	Color	Hours	Finish	Dim		L	W	H
49012-SU	LFX/DOD/CS/BK/WH/40K	11.3	912	Multi	4000K	50000	Black	✓	✓	5.9"	6.9"	8.7"
49014-SU	LFX/DOD/CS/WH/WH/40K	11.3	1000	120	4000K	50000	White	✓	✓	5.9"	6.9"	8.7"

# Outdoor Surface Mount

## Protek Design

These Sunlite Protek LED light fixtures are your go to for your outdoor residential lighting needs. From autumn to summer, these wet location ready fixtures won't disappoint.

- Polycarbonate Body with White Lens
- UL Listed - Wet Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Finish	Dim		L	W	H
<b>Round</b>												
48245-SU	LFX/DOD/PTR/BK/WH/40K	14	1400	120	4000K	50000	Black	✓	✓	8.8"	8.8"	4.7"
49008-SU	LFX/DOD/PTR/BK/WH/40K	22	1400	120	4000K	50000	Black	✓	✓	9.4"	9.4"	4.5"
48246-SU	LFX/DOD/PTR/WH/WH/40K	14	1400	120	4000K	50000	White	✓	✓	8.8"	8.8"	4.7"
<b>Square</b>												
48247-SU	LFX/DOD/PTS/BL/WH/40K	14	1400	120	4000K	50000	Black	✓	✓	9.9"	9.9"	4.4"
48248-SU	LFX/DOD/PTS/WH/WH/40K	14	1400	120	4000K	50000	White	✓	✓	9.9"	9.9"	4.4"



MKX Series

# Circular Pole-Top

## Outdoor Area Light

The Sunlite outdoor area pole-top fixtures are ideal for parking areas, airports and amusement parks. Their high output LEDs ensure the area is well lit while conserving energy. The circular light is directed downward providing a pleasant illumination over the designated area. These fixtures mount on a three inch post.

- Steel Body with Clear Lens
- Black Finish
- ETL Listed - Wet Location

\*3" pole not included



### Applications



Commercial



Roadway



Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	DIA	H
49180-SU	LFX/PTL/60W/50K	60	6700	120-277	5000K	50000	✓	18.0"	25.0"
49181-SU	LFX/PTL/80W/50K	80	8800	120-277	5000K	50000	✓	18.0"	25.0"

# Decorative Acorn Pole-Top

## Outdoor Area Light

The Sunlite outdoor area decorative acorn pole-top fixtures are ideal for urban areas, street lights or parking lots. These decorative fixtures can complement any surrounding environment. Unlike standard acorn fixtures, these LED fixtures do not require a screw-in lamp and are fitted with a low energy, high output LED chip. These fixtures mount on a three inch post.

- Steel Body with Diffused Lens
- Black Finish
- ETL Listed - Wet Location

\*3" pole not included



### Applications



Commercial



Roadway



Landscape



Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	DIA	H
49185-SU	LFX/PTL/60W/50K	60	5700	120-277	5000K	50000	✓	18.0"	40.0"
49186-SU	LFX/PTL/80W/50K	80	7600	120-277	5000K	50000	✓	18.0"	40.0"



# Floodlight

## Outdoor Area Light

The Sunlite outdoor floodlight fixtures provide the perfect illumination for landscape displays and building exteriors. With high lumen output and energy-saving LEDs, they are also ideal for walkways, sports fields and patios. In addition to creating aesthetically pleasing light, they also improve security and deter would-be intruders. These fixtures can be mounted onto a pole, junction box or a small trunnion mount (sold separately, see below).

- Die-cast Aluminum with Clear Lens
- Bronze or White Finish
- 70 CRI
- ETL Listed - Wet Location



### Applications



### Low Wattage (small)

Item#	Description	Watt	Lumen	Volt	Color	Hours	Finish	DLC	L	W	H
49170-SU	LFX/FL/30W/BRZ/50K	30	3300	120-277	5000K	50000	Bronze	✓	8.3"	6.7"	4.1"
49171-SU	LFX/FL/30W/WH/50K	30	3300	120-277	5000K	50000	White	✓	8.3"	6.7"	4.1"

### High Output (large)

Item#	Description	Watt	Lumen	Volt	Color	Hours	Finish	DLC	L	W	H
49172-SU	LFX/FL/80W/BRZ/50K	80	9360	120-277	5000K	50000	Bronze	✓	13.8"	9.5"	7.9"
49174-SU	LFX/FL/150W/BRZ/50K	150	18200	120-277	5000K	50000	Bronze	✓	13.8"	9.5"	7.9"

## Floodlight & Street Light Components

### Sensor Options



**Photocell Sensor**  
85330-SU LFX/STL/PC/MV



**Photocell Sensor**  
97080-SU

### Mounting Options

#### Low Wattage



**Junction Box Mounting**  
85332-SU LFX/STL/WIB/20/30



**Small Trunnion Mounting**  
85331-SU LFX/STL/TUB/20/30

#### High Output



**Large Trunnion Mounting**  
85333-SU LFX/STL/TUB/75/150/200/300

# Street Light

## Outdoor Area Light

The Sunlite street lights are ideal for lighting large areas. They are typically found on walkways, ramps, roadways and bike paths. Their high luminous efficiency provides high visibility while using significantly less energy. These fixtures can be mounted onto a pole, junction box or trunnion mount (sold separately). The photo cell sensor option (sold separately, see page 54) can save money and energy by automatically turning off the light when daylight is detected.

- Die-cast Aluminum with Clear Lens
- Bronze Finish
- 70 CRI
- ETL Listed - Wet Location



Photocell & Wall Mounting Options on page 54

### Applications



Commercial



Industrial



Roadway

## Low Wattage Street Light (small)

Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	L	W	H
85320-SU	LFX/STL/20W/MV/50K	20	2200	120-277	5000K	50000	✓	8.5"	7.3"	2.4"
85321-SU	LFX/STL/30W/MV/50K	30	3420	120-277	5000K	50000	✓	8.5"	7.3"	2.4"



Photocell & Wall Mounting Options on page 54

## High Output Street Light (large)

Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	L	W	H
85322-SU	LFX/STL/75W/MV/50K	75	9515	120-277	5000K	50000	✓	16.6"	11.7"	3.3"
85323-SU	LFX/STL/150W/MV/50K	150	18140	120-277	5000K	50000	✓	18.8"	13.6"	3.6"
85324-SU	LFX/STL/200W/MV/50K	200	22870	120-277	5000K	50000	✓	18.8"	13.6"	3.6"
85325-SU	LFX/STL/300W/MV/50K	300	35060	120-277	5000K	50000	✓	23.6"	14.3"	3.7"



# Wall Mount Outdoor Series

## Wall Pack

The Sunlite LED Slim Profile Wall Pack was designed as a maintenance free, energy efficient alternative to fluorescent, high pressure sodium, and metal halide fixtures. It provides uniform illumination while providing a comfortable visual experience. Ideal for lighting outdoor applications including garages, hotels, commercial buildings, schools, and hospitals. Its die-cast aluminum housing features a bronze finish and polycarbonate lens.

- Die-Cast Aluminum Body with Glass Lens
- Bronze Finish
- ETL Listed - Wet Location



Available



### Applications



Residential



Commercial



Industrial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
97085-SU	LFX/WP/40W/MV/D/50K	40	4150	120-277	5000K	50000	✓	✓	7.5"	14.0"	9.0"
97086-SU	LFX/WP/60W/MV/D/50K	60	6120	120-277	5000K	50000	✓	✓	7.5"	14.0"	9.0"
97077-SU	LFX/WP/80W/MV/50K/DLC	80	8148	120-277	5000k	50000	✓	✓	8.0"	14.5"	9.5"

# Cut Off Outdoor Series

## Wall Pack

- Die-cast with Tempered Glass Lens
- Bronze Finish
- 70 CRI
- ETL Listed - Wet Location



Available



### Applications



Residential



Commercial



Industrial

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
97065-SU	LFX/WP/60W/MV/50K	60	6000	120-277	5000K	50000	✓	✓	9.0"	14.0"	11.5"
97066-SU	LFX/WP/75W/MV/50K	75	7500	120-277	5000K	50000	✓	✓	9.0"	14.0"	11.5"

## Tall Pack Outdoor Series

### Wall Pack

The Sunlite LED Wall Pack Fixture is ideal for a multitude of outdoor applications. It offers maintenance free general and security lighting for loading areas, driveways, parking areas and storage areas, delivering uncompromising reliability for well-lit secure areas. Featuring LED technology, it offers high efficiency with significant energy savings compared to other technologies. It is rated for 35,000 hours and eliminates the need for frequent lamp replacements.

- Polycarbonate Body with Frosted Lens
- Bronze Finish
- 81 CRI
- ETL Listed - Wet Location
- Built-in Photocell



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		L	W	H
88102-SU	LFX/TP/15W/30K/PC	15	800	120	3000K	50000	-	-	6.0"	4.0"	10.5"
88103-SU	LFX/TP/15W/50K/ES/PC	15	1050	120	5000K	50000	-	✓	7.0"	5.0"	12.0"

## Canopy Outdoor Surface Mount

### Vandalproof

The Sunlite LED outdoor flood light fixture uses less energy and puts out a brighter, more aesthetically pleasing light than halogen, metal halide or high pressure sodium lights. Perfectly suited for retail, office and hospitality facilities. It's a perfect solution for parking lot lighting, security lighting or outdoor general illumination.

- Die-cast Aluminum Body with Polycarbonate Lens
- Bronze Finish
- 70 CRI
- UL Listed - Wet Location



### Applications



Available


Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
88127-SU	LFX/SCM/40W/D/50K	40	4200	120-277	5000K	50000	-	✓	8.9"	8.9"	4.1"
88124-SU	LFX/MCM/75W/50K	75	8100	120-277	5000K	50000	-	✓	10.4"	10.4"	4.3"

## Wall Mount


### Rotatable Wall Pack

Sunlite brings to you our rotatable wall pack that you can adjust to light any way you need. It is ideal for entrances, walkways, loading docks and many other applications.

- Aluminum Body with Clear Lens
- Black Finish
- UL Listed - Wet Location
- Rotatable



Available

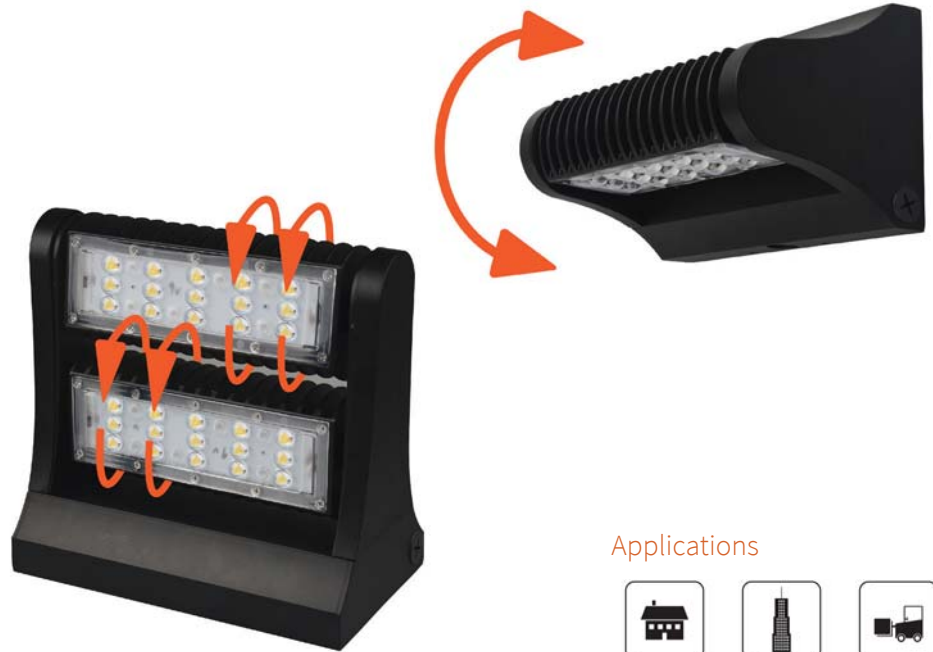

### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	L	W	H
97087-SU	LFX/RWP/40W/50K	40	5200	120-277	5000K	50000	*	9.2"	5.4"	5.3"
97088-SU	LFX/RWP/60W/50K	60	7800	120-277	5000K	50000	*	9.2"	8.7"	5.3"
97089-SU	LFX/RWP/80W/50K	80	10400	120-277	5000K	50000	*	9.2"	8.7"	5.3"

\* DLC Pending

## Wall Mount Outdoor Series

### Down Wall Pack

The Sunlite wall mount fixtures are designed for exterior wall mounting in commercial applications. They provide a sense of security and general purpose area illumination along building perimeters. With 95 LPW, they provide an efficient alternative to traditional wall mounts.

- Aluminum Body with Clear Lens
- Bronze Finish
- 70 CRI
- UL Listed - Wet Location



Available



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	L	W	H
97055-SU	LFX/WP/42W/DLC/50K	42	4000	120-277	5000K	50000	✓	11.0"	6.5"	5.5"

# Outdoor Series


## Floodlight

Sunlite's outdoor floodlight is ideal for landscape lighting or architectural wall washers. It's modern design with an IP65 rating will compliment any application it is installed on.

- Aluminum Body with Clear Lens
- 80 CRI
- ETL Listed - Wet Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
85301-SU	LFX/LED/FL/10W/50K/MV	10	900	100-277	5000K	50000	-	-	4.3"	2.0"	5.1"
85302-SU	LFX/LED/FL/20W/50K/MV	20	1800	100-277	5000K	50000	-	-	4.3"	2.0"	5.1"
85303-SU	LFX/LED/FL/30W/50K/MV	30	3000	100-277	5000K	50000	-	✓	6.1"	2.2"	6.9"
85304-SU	LFX/LED/FL/50W/50K/MV	50	5000	100-277	5000K	50000	-	✓	7.0"	3.0"	9.3"
85305-SU	LFX/LED/FL/100W/50K/MV	100	10000	100-277	5000K	50000	-	✓	9.8"	2.7"	11.2"
85306-SU	LFX/LED/FL/150W/50K/MV	150	15000	100-277	5000K	50000	-	✓	11.4"	3.2"	14.2"
85307-SU	LFX/LED/FL/200W/50K/MV	200	20000	100-277	5000K	50000	-	✓	14.2"	4.5"	19.7"

# Roadway

## Parking Lot and Street

Sunlite's roadway fixture will keep your property or roadway illuminated for additional security.

- Steel Body with Frosted Lens
- Gray Finish
- 70 CRI
- ETL Listed
- Built-in Photocell



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
49101-SU	LFX/RL/50W/50K/PC	50	5850	120-277	5000K	50000	-	✓	9.8"	14.5"	6.1"

## Outdoor Series

### Slim Profile Wall Pack

- Die Cast Aluminum Body with Polycarbonate Lens
- Bronze Finish
- 81 CRI
- UL Listed - Wet Location
- 50000 Hours Avg Rated Life



#### Applications



Residential



Commercial



Industrial

Item#	Description	Watt	Lumen	Volt	Color	Finish	Dim	DLC	L	W	H
49106-SU	LFX/WP/30W/50K	30	3150	100-277	5000K	Bronze	-	✓	6.5"	4.1"	7.8"

COMPONENTS

49107-SU | Knuckle Mounting

49108-SU | Bracket Mounting



## Adjustable Slim Profile Outdoor Series

### Down Wall Pack

The Sunlite slim wall pack fixtures deliver impressive light distribution with a compact low-profile design. These energy efficient fixtures are ideal for security, pathway, perimeter or entryway lighting. Their smooth contemporary design is available in bronze and white.

- 50000 Hours Avg Rated Life
- Wall Mounted
- ETL Listed - Wet Location
- Multiple Adjustable Angles



Available



#### Applications



Residential



Commercial



Industrial

Item#	Description	Watt	Lumen	Volt	Color	Finish	Dim	DLC	L	W	H
49165-SU	LFX/SWP/50W/BRZ/50K	50	5660	120-277	5000K	Bronze	-	✓	6.7"	3.7"	8.3"
49166-SU	LFX/SWP/50W/WH/50K	50	5660	120-277	5000K	White	-	✓	6.7"	3.7"	8.3"
49167-SU	LFX/SWP/75W/BRZ/50K	75	8620	120-277	5000K	Bronze	-	✓	9.6"	4.3"	10.4"
49168-SU	LFX/SWP/75W/WH/50K	75	8620	120-277	5000K	White	-	✓	9.6"	4.3"	10.4"



# Outdoor Security Series

## 2 Head Outdoor Light

- Aluminum and Plastic Body with Frosted Lens
- 80 CRI
- ETL Listed - Wet Location
- 50000 Hours Avg Rated Life



Available Available



### Applications



Residential



Commercial



Industrial

Item#	Description	Watt	Lumen	Volt	Color	Finish	DLC	L	W	H
Brown with Motion Sensor										
88916-SU	LFX/OPF/MS/20W/30K/BR	20	1800	120	3000K	Brown	—	7.5"	7.3"	6.5"
88917-SU	LFX/OPF/MS/20W/50K/BR	20	1800	120	5000K	Brown	—	7.5"	7.3"	6.5"
White with Motion Sensor										
88918-SU	LFX/OPF/MS/20W/30K/WH	20	1800	120	3000K	White	—	7.5"	7.3"	6.5"
88919-SU	LFX/OPF/MS/20W/50K/WH	20	1800	120	5000K	White	—	7.5"	7.3"	6.5"
Bronze Standard										
89095-SU	LFX/OPF/20W/30K	20	1050	120-240	3000K	Bronze	—	6.5"	8.5"	5.0"



## Landscape Series

### Adjustable Head

Sunlite's LED landscape spike light provides a simple outdoor ground lighting solution. The spike end allows for easy grounding. The rotating knuckle facilitates adjustable positioning to provide the best possible lighting angles.

- Brown Finish



Application



Landscape

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W
88155-SU	LFX/OFL/12W/PC/50K	12	1000	120	5000K	50000	-	-	4.0"	14.0"

## Outdoor Series RGB

### Floodlight

The Sunlite LED Outdoor Flood Light Fixture uses less energy and puts out a brighter, more aesthetically pleasing light than halogen, metal halide or high pressure sodium lights. Perfectly suited for retail, office and hospitality facilities. It's a perfect solution for parking lot lighting, security lighting or outdoor general illumination.

- Aluminum Body with Clear Lens
- 80 CRI
- ETL Listed
- RGB Remote Control Included



Applications



Residential



Commercial



Landscape

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
80176-SU	LFX/LED/20W/FL/RGB	20	1000	95-265	RGB	30000	-	-	7.3"	3.7"	6.3"

## Outdoor Wall Sconce

### Lantern Design

The Sunlite slim lantern design delivers impressive light distribution with a compact low-profile design. These energy efficient fixtures are ideal for security, pathway, perimeter or entryway lighting.

- Steel Body with Amber Lens
- Copper Bronze Finish
- 81 CRI
- UL/ETL Listed



Applications



Residential



Commercial



Landscape

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
49025-SU	LFX/DOD/L/6/12W/30K	12	400	120	3000K	50000	-	-	7.5"	6.0"	12.5"
49026-SU	LFX/DOD/L/8/15W/30K	15	500	120	3000K	50000	-	-	9.0"	4.5"	16.0"



## Decorative Outdoor Series

### Up & Down Light

Sunlite's outdoor wall sconces features the perfect balance between vintage and modern aesthetics that perfectly blends in with both the high-end and everyday home's front porch/veranda, to the backyard. Its durable yet chic brushed nickel steel construction guarantees you a long lasting attractive light fixture that will stand the test of time.

- Steel Body with Acrylic Lens
- UL/ETL Listed - Wet Location
- 50000 Hours Avg Rated Life



### Brushed Nickel Finish

Up or Down



Up & Down

### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
49068-SU	LFX/DOD/T/6/12W/D/30K	12	800	120	3000K	50000	✓	-	4.5"	4.0"	6.0"
49069-SU	LFX/DOD/T/8/24W/D/30K	24	1600	120	3000K	50000	✓	-	2.8"	4.5"	8.3"

### Bronze Finish

Up & Down



Up & Down

### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
88130-SU	LFX/R/UD/26W	26	1750	120-277	5000K	50000	-	-	7.0"	5.0"	7.0"
88135-SU	LFX/S/UD/26W	26	1600	120-277	5000K	50000	-	-	7.0"	5.0"	7.0"



## Outdoor Wall Sconce

### Raindrop Glass Design

The Sunlite Outdoor Wall Sconce fixtures are designed for indoor and outdoor use. They are ideal for illuminating foyers, entrance ways and balconies. Their hidden LEDs refract through the glass, creating a peaceful raindrop glass effect. Their glass is complemented by an elegant frame with a black matt finish.

- Metal Body with Clear Glass Raindrop Lens
- Black Finish
- 80 CRI
- ETL Listed - Wet Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		W	D	H
81169-SU	LFX/WS/9W/30K/BL	9	450	120	3000K	50000	-	-	4.8"	2.5"	13.8"
81170-SU	LFX/WS/12W/30K/BL	12	600	120	3000K	50000	-	-	6.5"	2.5"	13.8"

## Outdoor Wall Sconce

### Antique Style

The Sunlite Outdoor Wall Sconce fixtures are designed for indoor and outdoor use. They are ideal for walkways, entrance ways and building exteriors. Their acrylic black finish housing creates a neat antique look.

- Aluminum Body with Acrylic Lens
- Black Finish
- 80 CRI
- ETL Listed - Wet Location



### Applications



Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim		W	D	H
81164-SU	LFX/WS/12/15W/30K/BL	15	800	120	3000K	50000	-	-	6.0"	4.0"	12.0"
81165-SU	LFX/WS/18/20W/30K/BL	20	1000	120	3000K	50000	-	-	6.0"	4.0"	18.0"
81166-SU	LFX/WS/24/23W/30K/BL	23	1200	120	3000K	50000	-	-	6.0"	4.0"	24.0"



# Vapor Proof Jelly Jar

## Industrial Design

This versatile vapor proof wall or ceiling mount fixture is perfect for many types of general lighting needs. Features a durable weather-tight and vandal proof design.

- Die Cast Aluminum Body with Frosted Lens
- Grey Powder Coated Finish
- UL/ETL Listed - Wet Location

3  
Year  
Warranty



3



2



1

### Applications



Commercial



Industrial

Img#	Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	DLC	L	W	H
1	88140-SU	LFX/VT/WM/12W/50K	12	840	120-277	5000K	30000	-	-	5.0"	7.5"	11.0"
2	88146-SU	LFX/VT/SM/10W/50K	10	730	120-277	5000K	30000	-	-	5.5"	5.5"	11.0"
3	88147-SU	LFX/VT/PM/12W/50K	12	710	120-277	5000K	30000	-	-	5.0"	5.0"	11.0"




# Temporary Construction LED High Bays

Linkable With Wire Guard

Sunlite's Temporary Construction High-bay provides temp lighting in lieu of the traditional high-pressure sodium fixture to your construction site. With the latest technology it will provide energy savings while also being durable.

- Aluminum & Plastic Body with Clear Lens
- 80 CRI
- UL Listed
- IP64
- Remote Control Included



LED Bottom



Portable




Remote Control



Single Unit



Linkable

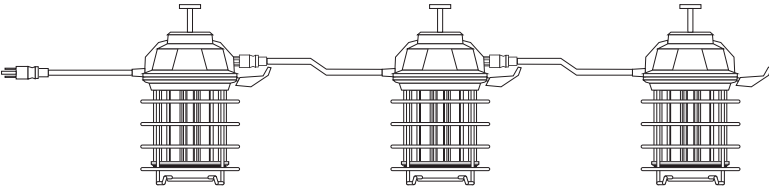

**Cable Length:**  
 Standard: 5'  
 60W Option: 20'  
 100W Option: 35'  
 150W Option: 50'

### Applications



Commercial



Industrial



Construction

Item#	Description	Watt	Lumen	Volt	Color	Hours	DLC	L	W	H
<b>Linkable</b>										
85277-SU	LFX/LED/CC/60W/50K	60	6000	120	5000K	50000	*	6.2"	6.2"	10.6"
85273-SU	LFX/LED/CC/100W/50K	100	10000	120	5000K	50000	*	6.2"	6.2"	12.0"
85279-SU	LFX/LED/CC/150W/50K	150	15000	120	5000K	50000	*	6.2"	6.2"	13.4"
<b>Single Unit</b>										
85278-SU	LFX/LED/CC/100W/MV/50K	100	11000	120	5000K	50000	*	6.3"	6.3"	14.0"

\* DLC Pending

# Corn Cob Lamps

Super Bright

- 100-277 Volts
- >80 CRI
- UL Listed
- Non Dimmable
- IP65
- Direct Line Voltage
- HID Replacement Lamps
- Compatible with Enclosed Fixtures
- Recommended Use Without Ballast
- Mogul Adapter Included with all Medium Bases



Item#	Description	Watt	Eq. Watt	Color	Hours	Lumen	LPW	DLC	MOL	DIA
-------	-------------	------	----------	-------	-------	-------	-----	-----	-----	-----

Medium Base

80850-SU	CC/LED/15W/E26/MV/50K	15	50	5000K	50000	1950	130	-	5.7"	2.5"
80841-SU	CC/LED/19W/E26-E39/MV/50K	19	75	5000K	50000	2470	130	-	6.1"	2.5"
80842-SU	CC/LED/27W/E26-E39/MV/50K	27	100	5000K	50000	3645	135	-	7.4"	3.7"
80486-SU	CC/LED/36W/E26-E39/MV/50K	36	150	5000K	50000	4860	135	-	8.6"	3.6"
80576-SU	CC/LED/45W/E26-E39/MV/50K	45	175	5000K	40000	5400	120	-	9.9"	3.5"

Medium Base | Amber

80582-SU	CC/LED/54W/E26-E39/MV/AMBER	54	100	1700K-1900K	40000	4320	80	-	10.9"	3.5"
----------	-----------------------------	----	-----	-------------	-------	------	----	---	-------	------

Mogul Base

80843-SU	CC/LED/54W/E39/MV/50K	54	200	5000K	50000	7290	135	✓	10.4"	3.6"
80584-SU	CC/LED/75W/E39/MV/50K	75	200	5000K	40000	8250	110	✓	12.1"	3.7"
80844-SU	CC/LED/100W/E39/MV/50K	100	400	5000K	50000	14000	140	✓	12.8"	5.1"
80845-SU	CC/LED/125W/E39/MV/50K	125	600	5000K	50000	18400	147	✓	14.2"	5.1"

## Construction Worklight Series

### Tripod Stand

Sunlite's Construction Work light uses the latest LED technology to replace the traditional halogen versions. It is ideal for the job sites with no lighting that can assist different trade in completing their work.

- Yellow Finish
- 80 CRI
- UL Listed - Damp Location



#### Applications



Commercial



Industrial



Construction

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	L	W	H
88112-SU	LFX/WL/40W/40K	40	3000	120	4000K	35000	-	7.7"	2.9"	10.8"

## Construction Worklight Series

### Portable

- 80 CRI
- Black and Red Finish
- UL Listed - Damp Location



#### Applications



Commercial



Industrial



Construction

Item#	Description	Watt	Lumen	Volt	Color	Hours	Dim	L	W	H
04364-SU	LFX/WL/30W/W	30	2000	120	4000K	35000	-	8.0"	4.7"	10.7"






## Refrigerator Display Strip

Wet Rated

- Plastic Body with White Finish
- 80 CRI
- UL Listed - Wet Location

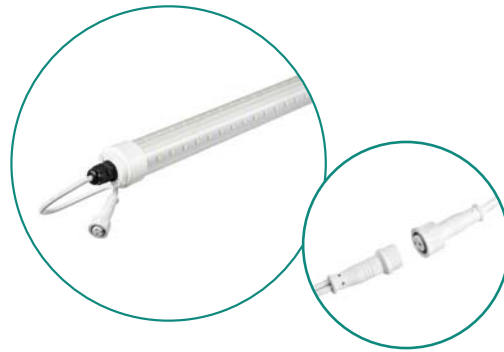

5  
Year  
Warranty



### Applications



Commercial



Retail




Hospitality

Item#	Description	Watt	Lumen	Volt	Beam	Color	Hours	DIM	DLC
<b>3 Foot</b>									
88186-SU	LFX/LFL/12W/MV/50K/3'	12	950	120-277	>140°	5000K	50000	-	-
<b>4 Foot</b>									
88187-SU	LFX/LFL/18W/MV/50K/4'	18	1500	120-277	>140°	5000K	50000	-	✓
<b>5 Foot</b>									
88185-SU	LFX/LFL/22W/MV/50K/5'	22	1850	120-277	>140°	5000K	50000	-	✓

# Strip Fixture

- Snap-on components for easy assembly and maintenance
- Available in lengths from 24 to 96 inches
- Surface, stem or chain mountable
- White Finish
- Steel Body
- ETL Listed

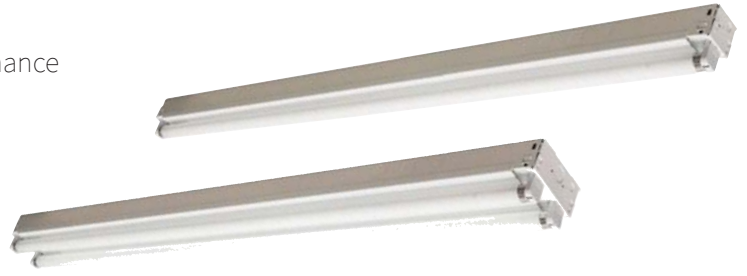

Advance Bypass



Bypass



Plug & Play

## Applications



Commercial



Industrial

Item#	Item#	Item#	Description	L	W	H
92336-SU	92188-SU	92031-SU	EC-1-F17T8	24.0"	3.1"	2.0"
92337-SU	92118-SU	92118-SU	EC-2-F17T8	24.0"	4.3"	1.9"
92331-SU	92030-SU	92020-SU	EC-1-F32T8	48.0"	3.1"	2.0"
92332-SU	92034-SU	92087-SU	EC-2-F32T8	48.0"	4.3"	1.9"
92199-SU			EC-2-F96T8	96.0"	4.2"	1.9"
<b>Tandem</b>						
92333-SU	92186-SU	92186-SU	ECT-2-F32T8	96.0"	3.1"	2.0"
92334-SU	92123-SU	92161-SU	ECT-4-F32T8	96.0"	4.3"	1.9"
92335-SU	92309-SU	92178-SU	ECT-6-F32T8	96.0"	4.3"	1.9"

# Vaportight



Advance Bypass



Bypass



Plug & Play

## Applications



Commercial



Industrial



Medical

Item#	Item#	Item#	Description	L	W	H
92318-SU	92733-SU	92661-SU	VTS-2-F32T8	51.7"	6.8"	4.4"
92319-SU	92732-SU	92684-SU	VTST-4-F32T8	99.7"	6.8"	4.4"
92735-SU			VTS-2-F96T8	99.7"	6.8"	4.4"

## Hallway Fixture

Applications



Advance Bypass



Bypass



Plug & Play



Commercial



Industrial

Item#	Item#	Item#	Description	L	W	H
92321-SU	92875-SU	92865-SU	BB213-WH-CL-2-F17T8	24.3"	4.4"	4.5"
92322-SU	92876-SU	92867-SU	BB213-WH-CL-2-F32T8	48.3"	4.4"	4.5"

## Wraparound Fixture

Applications



Advance Bypass



Bypass



Plug & Play



Commercial



Industrial

Item#	Item#	Item#	Description	L	W	H
92327-SU	92362-SU	92353-SU	WA9-2-F17T8	24.0"	9.3"	3.1"
92328-SU	92361-SU	92355-SU	WA9-2-F32T8	48.0"	9.3"	3.1"
92429-SU	92442-SU	92419-SU	WA11-2-F32T8	48.0"	11.3"	3.4"
92330-SU	92443-SU	92439-SU	WA15-4-F32T8	48.0"	16.0"	3.4"
92446-SU			WA11-2-F96T8	96.0"	11.2"	3.4"
<b>Tandem</b>						
92325-SU	92481-SU	92477-SU	WA11T-4-F32T8	96.0"	11.3"	3.4"
92326-SU	92485-SU	92483-SU	WA15T-8-F32T8	96.0"	16.0"	3.4"

## Highbay Premium

Application



Advance Bypass



Bypass



Plug & Play



Industrial

Item#	Item#	Item#	Description	L	W	H
92323-SU	92613-SU	92604-SU	FHBP-4-F32T8	48.0"	12.6"	3.9"
92324-SU	92612-SU	92605-SU	FHBP-6-F32T8	48.0"	19.9"	3.9"

# Advanced Bypass T8 Tubular

Ballast Removal Required

- UL Listed
- 120-277 Volt
- Instant Start
- High Lumen Per Watt
- 50,000 Hours



## Advance Bypass Compatible Lamps

Sunlite's LED advance bypass line works straight off the line voltage and directs the power to each end of the fixture. See page 67 for compatible lamps.



### Applications



## 2' Bi-Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88430-SU	T8/LED/ADV/2'/9W/DLC/30K	9	24"	G13	1,100	122	3000K	82	✓
88431-SU	T8/LED/ADV/2'/9W/DLC/40K	9	24"	G13	1,150	127	4000K	82	✓
88432-SU	T8/LED/ADV/2'/9W/DLC/50K	9	24"	G13	1,150	127	5000K	82	✓

## 3' Bi-Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88445-SU	T8/LED/ADV/3'/12W/DLC/30K	12	36"	G13	1,400	116	3000K	82	✓
88446-SU	T8/LED/ADV/3'/12W/DLC/40K	12	36"	G13	1,450	120	4000K	82	✓
88447-SU	T8/LED/ADV/3'/12W/DLC/50K	12	36"	G13	1,450	120	5000K	82	✓
88448-SU	T8/LED/ADV/3'/12W/DLC/65K	12	36"	G13	1,450	120	6500K	82	✓

## 4' Bi-Pin Tube

14 Watt

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88433-SU	T8/LED/ADV/4'/14W/DLC/30K	14	48"	G13	1,700	121	3000K	82	✓
88434-SU	T8/LED/ADV/4'/14W/DLC/40K	14	48"	G13	1,800	128	4000K	82	✓
88435-SU	T8/LED/ADV/4'/14W/DLC/50K	14	48"	G13	1,800	128	5000K	82	✓
88449-SU	T8/LED/ADV/4'/14W/DLC/65K	14	48"	G13	1,800	128	6500K	82	✓

17 Watt

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88436-SU	T8/LED/ADV/4'/17W/DLC/30K	17	48"	G13	2,100	123	3000K	82	✓
88437-SU	T8/LED/ADV/4'/17W/DLC/40K	17	48"	G13	2,200	129	4000K	82	✓
88438-SU	T8/LED/ADV/4'/17W/DLC/50K	17	48"	G13	2,200	129	5000K	82	✓

## 8' Single Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88440-SU	T8/LED/ADV/8'/43W/30K	43	96"	FA8	5,000	116	3000K	82	—
88441-SU	T8/LED/ADV/8'/43W/40K	43	96"	FA8	5,500	127	4000K	82	—
88442-SU	T8/LED/ADV/8'/43W/50K	43	96"	FA8	5,500	127	5000K	82	—
88443-SU	T8/LED/ADV/8'/43W/65K	43	96"	FA8	5,500	127	6500K	82	—



# Bypass T8 Tubular

Rewiring Required

- UL Classified
- No Ballast Required
- 120-277 Volt
- 50,000 Hours



## Applications



## 2' Bi-Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88034-SU	T8/LED/2'/9W/40K/DLC	9	24"	G13	1,150	128	4000K	82	✓
88035-SU	T8/LED/2'/9W/50K/DLC	9	24"	G13	1,150	128	5000K	82	✓

## 4' Single Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88162-SU	T8/LED/4'/15W/DLC/30K	15	48"	G13	1,700	113	3000K	82	✓



## T8 Tubular

Instant Start

- Plug and Play
- Ballast Required
- UL Listed
- Glass Tubes
- 50,000 Hours



## 2' Bi-Pin Tube

### Applications



Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88400-SU	T8/LED/2'/8W/IS/DLC/30K	8	24"	G13	1,200	150	3000K	82	✓
88399-SU	T8/LED/2'/8W/IS/DLC/35K	8	24"	G13	1,200	150	3500K	82	—
88401-SU	T8/LED/2'/8W/IS/DLC/40K	8	24"	G13	1,250	156	4000K	82	✓
88402-SU	T8/LED/2'/8W/IS/DLC/50K	8	24"	G13	1,250	156	5000K	82	✓
88403-SU	T8/LED/2'/8W/IS/65K	8	24"	G13	1,250	156	6500K	82	—

## 3' Bi-Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
87960-SU	T8/LED/3'/11W/IS/30K	11	36"	G13	1,450	132	3000K	82	—
87962-SU	T8/LED/3'/11W/IS/40K	11	36"	G13	1,450	132	4000K	82	—
87964-SU	T8/LED/3'/11W/IS/50K	11	36"	G13	1,450	132	5000K	82	—
87963-SU	T8/LED/3'/11W/IS/65K	11	36"	G13	1,450	132	6500K	82	—

## 4' Bi-Pin Tube

11.5 Watt

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88404-SU	T8/LED/4'/11.5W/IS/DLC/30K	11.5	48"	G13	1,700	148	3000K	82	✓
88412-SU	T8/LED/4'/11.5W/IS/DLC/35K	11.5	48"	G13	1,700	148	3500K	82	—
88405-SU	T8/LED/4'/11.5W/IS/DLC/40K	11.5	48"	G13	1,800	157	4000K	82	✓
88406-SU	T8/LED/4'/11.5W/IS/DLC/50K	11.5	48"	G13	1,800	157	5000K	82	✓
88407-SU	T8/LED/4'/11.5W/IS/65K	11.5	48"	G13	1,800	157	6500K	82	—

15 Watt

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88408-SU	T8/LED/4'/15W/IS/DLC/30K	15	48"	G13	2,100	140	3000K	82	✓
88413-SU	T8/LED/4'/15W/IS/DLC/35K	15	48"	G13	2,100	140	3500K	82	—
88409-SU	T8/LED/4'/15W/IS/DLC/40K	15	48"	G13	2,200	147	4000K	82	✓
88410-SU	T8/LED/4'/15W/IS/DLC/50K	15	48"	G13	2,200	147	5000K	82	✓
88411-SU	T8/LED/4'/15W/IS/65K	15	48"	G13	2,200	147	5000K	82	—

## 8' Single Pin Tube

Item#	Description	Watts	Length (in)	Base	Lumens	Efficacy	CCT	CRI	DLC
88245-SU	T8/LED/8'/42W/IS/HO	42	96"	RDC	5,500	131	4000K	82	—
88240-SU	T8/LED/8'/33W/IS/40K	33	96"	FA8	4,400	133	4000K	82	—
88243-SU	T8/LED/8'/33W/IS/50K	33	96"	G13	4,400	133	5000K	82	—
88241-SU	T8/LED/8'/33W/IS/65K	33	96"	FA8	4,400	133	6500K	82	—

## Specifications

Due to the rapid advancement of LED technology, specifications are subject to change without notice.

## Product & Descriptions

We are not responsible for any typographical errors.

## Warranty

Sunshine Lighting, Inc. (Sunlite) warrants most of our LED products for a period of one to five (1-5) years from the date of delivery (specific to the individual product warranty on the packaging or available at [www.sunlite.com](http://www.sunlite.com)) provided that said products have been installed and maintained in accordance with Sunlite's installation instructions. This warranty is limited to the repair or replacement of defective material or entire product and shall be determined at the discretion of the manufacturer as to what action is taken.

This warranty is limited to the product specifically and in no means warrants any incurred labor costs by any party involved.

Sunlite extends its warranty to the immediate buyer.

The immediate buyer must receive a Return Material Authorization (RMA) number prior to the return and the return must be visibly marked with the RMA number and the product must be returned (shipping prepaid) to Sunlite at 744 Clinton St. Brooklyn, NY. 11231.

The return must be within 30 days of receiving the RMA from Sunlite.

The warranty is subject to the following provisions:

A liability under this warranty is limited to free repair or replacement (at the manufacturers' discretion) of any operational defect and shall not extend to any other damages in connection to the misuse or mishandling of said product.

The warranty shall not apply to units which have not been handled in accordance with normal conditions of use, or units which have been subsequently processed or modified in any way, or units which have been subject to any damage affecting the overall operation of the Sunlite product.

Sunlite warranties on component parts of materials not manufactured by Sunlite may differ from the terms specified herein and will supersede Sunlite's warranty.

The manufacturers' liability will also not apply in cases where defects are not reported within 30 days after they have become recognizable by the initial buyer or by the users of the product.

\*\*\*Building and safety codes vary widely throughout the world. Sunlite does not control nor will it be responsible for the selection of product supplied by others, configurations, or the installation of the product in a ceiling, wall or other area. Sunlite makes no other warranties or representation, either expressed or implied, concerning product fitness for a particular purpose. Sunlite will fabricate to dimensions shown on Sunlite supporting documentation but will not take responsibility for failure of submitting party(s) shop drawing dimensions against job site conditions. In no event will Sunlite be liable for direct, indirect, special or consequential damages including but not limited to loss of profit or use. Sunlite reserves the right to inspect or have returned all products alleged to be defective excluding shipping and handling costs. Sunlite makes no other warranty, expressed or implied, regardless of product. \*\*\*

# Sign up at [sunlite.com](http://sunlite.com) to access great features!

- ✓ Place & manage orders
- ✓ See pricing & availability
- ✓ See & print document history
- ✓ See new item arrivals
- ✓ New category pages
- ✓ Improved product search
- ✓ Print Spec sheets
- ✓ Mobile friendly



Sunshine Lighting  
744 Clinton Street  
Brooklyn, NY 11231

